

PRODUCT SPECIFICATION (产品参数)

Model No. 型号	RX-48TDX	T8	T12
LEDs & Power LED灯泡数及功率	1512pcs	60pcs x 0.5W<白>/60pcs x 0.5W<黄> 110pcs x 0.3W<彩色>	120pcs x 0.5W<白>/120pcs x 0.5W<黄> 120pcs x 0.3W<彩色>
Out put Wattage 输出功率	300W	输出:30W	输出:50W
Color Temperature 色温	3000K - 5600K	3000K-5600K	2700K-9999K
Operating Voltage 工作电压	AC-110V-240V	DC-15V 3A 《输入45W》	DC-15V 5A 《输入70W》
Compatibility 兼容性	AC POWER 交流电 Sony V Mount Battery (DC) V卡口电池座	AC Adaptor 适配器 Sony F Mount Battery 锂电池	AC Adaptor 适配器 Sony F Mount Battery 锂电池
Dimming 调光	0-100% Step-less dimming ON/OFF 开关 Touch Screen 触屏	0-100% Step-less dimming ON/OFF 开关 Turning Knob 旋钮	0-100% Step-less dimming ON/OFF 开关 Turning Knob 旋钮
Beam Angle 照射角度	10-360°	5600K/50° 5600K+RGB/53°	5600K/60° 5600K+RGB/62°
Control Function 调控方式	Touch Screen Turning knob DMX 2.4G remote/RC-3T 触屏 旋钮 DMX 2.4G遥控器RC-3T	ON/OFF 开关 点阵液晶屏彩屏 遥控RC-5	ON/OFF 开关 点阵液晶屏彩屏 遥控RC-5
CRI 显色度	95	95	95
照度 (0.5m/1m/2m/3m)	0.5M:19200 1M:7540 2M: 2460	5600K(配RGB) 0.5M 5000 / 1M 1260 / 2M 326 5600K 0.5M 4140 / 1M 1060 / 2M 270 3000K 0.5M 3655 / 1M 903 / 2M 237	5600K(配RGB) 0.5M 5320 / 1M 1370 / 2M 355 5600K 0.5M 4390 / 1M 1160 / 2M 289 2700K 0.5M 3940 / 1M 1040 / 2M 266
Footcandles英尺烛光 (0.5m/1m/2m/3m)	0.5M:1784 1M:701 2M:229	5600K(配RGB) 0.5M 465 / 1M 117 / 2M 30 5600K: 0.5M 385 / 1M 99 / 2M 25 3000K: 0.5M 340 / 1M 84 / 2M 22	5600K(配RGB) 0.5M 494 / 1M 127 / 2M 33 5600K / 0.5M 408 / 1M 108 / 2M 27 2700K / 0.5M 366 / 1M 97 / 2M 25
Mounting Method 安装配套	X-Frame+CL-16 X支架+万向接头	-	-
Dimensions 机身尺寸	布灯: 1215x615mm 电源: 320x155x140mm	224x149x45mm	340x325x37mm
Weight 重量	Light 布灯:1.36KG Control Box电源:3.55KG	灯:0.77KG	灯:0.63KG
Noise Level(dB) 噪音的分贝强度	/	/	/
In the box 配件	-	-	-
Optional Accessories 选购配件	-	-	-

锐鹰有限公司(FALCON EYES LTD.)

Address 香港九龙红磡鹤园街2G号恒丰工业大厦一期11字楼E1室
Unit E1, 11/F,Phase 1,Hang Fung Building,2G Hok Yuen Street,
Hung Hom,Kowloon,Hong Kong

Tel 852-2363-2825 Email info@falconeyes.com.hk

Fax 852-2363-3856 Website www.falconeyes.com.hk



锐鹰官方网站 (香港)
Falcon Eyes Ltd Official Site (HK)



锐鹰官方微信
关注了解更多资讯

FALCON EYES
SINCE 1993

FILMING
LED TUBE

LED 影视光管灯



2.4G无线遥控

内置锂电池
3000K-5600K

2018-2019
锐鹰新品

LED LIGHTPIPE:LB-16/32
LED 光管灯 LB-16/32




The LB- bar LED is a handy LED bar which generates beautiful soft light. It is perfect to use in studio or outdoor with the internal rechargeable battery. The white diffuser is more than 180° which the light is spreading more evenly.

There is also different connecting accessories which able to combine multiple units to form a longer light tube or create different shapes of lighting. The color temperature is from 3000K-5600K adjustable and there is a 2.4G remote RC-3T available to control multiple units (Optional accessories).

LB-16及LB-32 LED灯棒可以制造柔和的灯光，适合在影室或户外使用。机体内置锂电池可以充电循环使用。表面的弧形柔光片更达至180°，令灯光分布更均匀。

LED灯棒可以配合连接配件使用，连接成更长的灯棒或不同形状的光效。色温更可从3000K-5600K调节。配合2.4G遥控器RC-3T（选购配件）可以令多支LED灯棒同步调较。

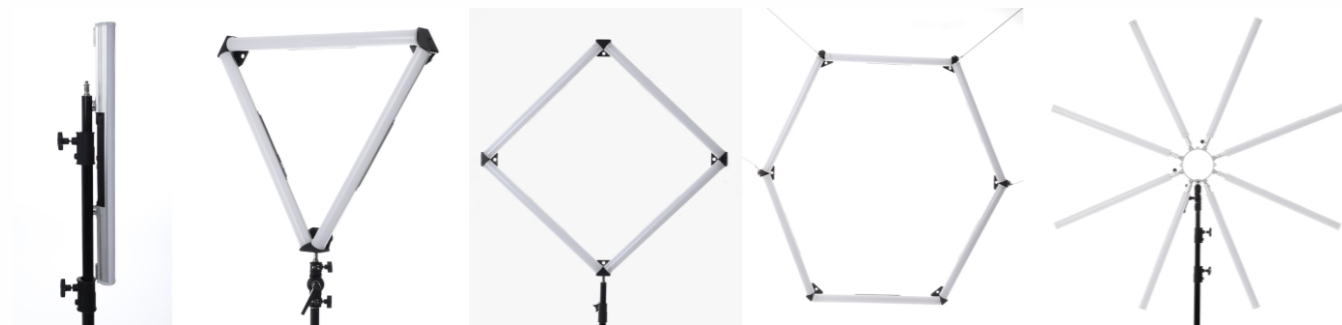

LB-16-K3 (Three lights Kit 三灯套装)
LB-16 x3 LB-A x2 套装箱 x1



LB-16-K6 (Six lights Kit 六灯套装)
LB-16 x6 LB-A x4 套装箱 x1



UO-SERIES U4/U8 SKY LIGHT
天灯 U4/U8




The FalconEyes UO-series U8 Sky Light is designed to provide bi-color softlight from up above the ground level, performing like a portable ceiling soft light when using with light boom. The U8 is developed with built-in DMX feature for easy adjustment on the color and light setting, while 2.4GHz remote control (RC-3T controller) is also available to meet different shooting requirements.

As from the latest LED technology, U8 has achieved a maximum 800W power output and a high CRI of Ra 98 professional level lighting, with the help of the cylindrical shaped diffuser and softbox, producing professional footage is now easier than ever.


锐鹰新研制的优仕U8天灯能于高处提供双色柔光光源，配合灯架横杆使用时，即变身成便携式天花柔光灯。U8可通过DMX控制调整色温和亮度，及2.4GHz远程操控来调整灯光设置（配合RC-3T遥控器使用），使其能满足不同场景的拍摄需求。

配合现时新的LED技术，U8已成功达到总输出800W以及高显色指数(CRI 98)的高品质光源。其独特设计的圆柱形柔光罩及柔光箱能有效地做出优美的柔光效果，令你能轻松地制作出专业视频。

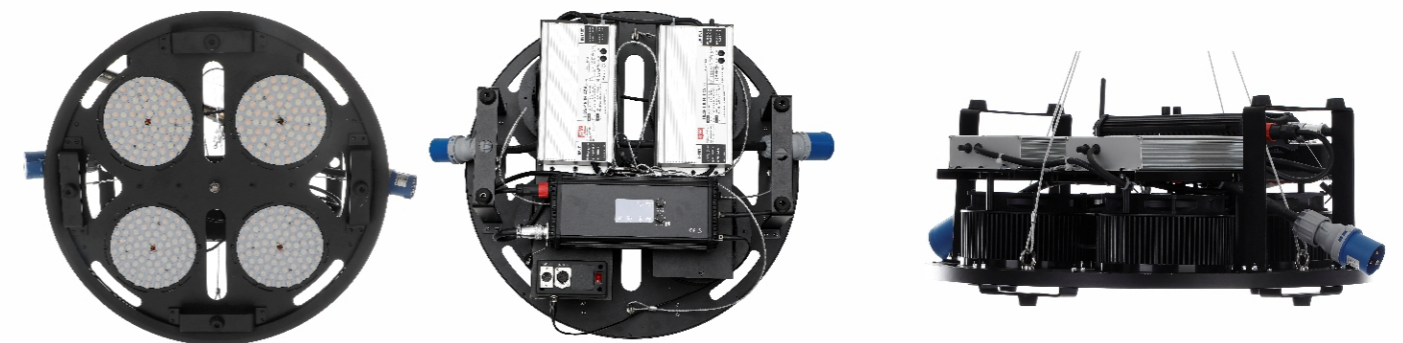

U8(带散热风扇)

功率及灯泡数: 800W (200W x 4) 320pcs (320x3W)
色温: 3000K- 10000K
照度: 1M:107000 2M:37700 3M:18300
英尺烛光: 1M:9944 2M:3504 3M:1701

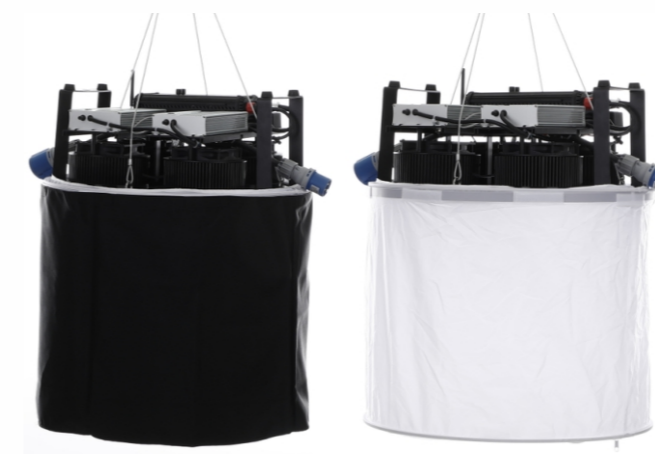

U4(400W)

ROLL-FLEX RGB SERIES:RX-748/RX-782
RGB 7彩卷布灯RX-748/RX-782



CC-20

RX-748

Roll-Flex RGB Series

Falcon Eyes new RGBW LED tech has been applied to the best selling Roll-flex series. With the flexibility of the Roll-able LED mat and RGB LED, more lighting effects can be made and sure can help to transfer your imagination to actual practice.

The Roll-Flex RGB is also supported with DMX control which allows even more possibility on application. With DMX control Roll-Flex RGB light can be programmed to create different motion background like police car light or any color movement effect. This will be a great solution on portable effect lights and small video production.

7彩卷布灯

锐鹰把最新的RGB LED灯技术套用到最畅销的卷布灯上，卷布灯的功能配合RGB LED灯可创造出更多样化的灯光效果，可以把想像的效果转化为实践。

7彩卷布灯同时亦支援DMX控制系统，而且可令7彩卷布灯的应用富更多可能性。配合DMX控制的7彩卷布灯可以编入程式，作出不同的动感光效，如警车灯效果，或其他任何动态光效。这将会成为在影视及舞台上的一一个优质解决方案。

RX-748-K8(八灯套装)



YK005

RX-782 (易撑雷达罩七彩布灯 220W)



RX-48TDX 300W 3000-5600K



CC-20

RX-48TDX-K8(八灯套装)



TAGRAM RGB LED LIGHT TAGRAM系列机顶RGB LED灯

T8&T12



T8

输出:30W 3000K-5600K
CRI:95
尺寸: 224x149x45mm



T12

输出:50W
2700K-9999K
CRI:95
尺寸: 340x325x37mm

The new Tagram RGB LED light is a series combines with different table top RGB lighting which is perfectly for small studio use.

The highlight of these RGB lights are able to use the tungsten and white LED to provide a wide range color temperature choice from 2700K to 9999K with a high CRI quality of 95. Tungsten and White LED can also separate control with RGB LED which RGB LED can add saturation on different color temperature setting.

RGB LED can be adjust saturation from 0-255 and is able to adjust in digit which able to provide a precise setting to satisfy different requirements.

Tagram is now coming with a 30W RGB-LED Panel T-8 and a 50W roll-flex RGB panel T-12. They can both be mounting on stands or even on camera. The ball-head mounting can be easily attached to different studio mounting system which is very convenient and fast when changing settings. Both units also support SONY NP-F battery so it can support outdoor operation as well.

新的Tagram系列机顶RGB LED灯是一个主张轻巧易用的便携彩色LED系列，十分适合小型影室创造不同颜色灯光效果使用。

Tagram系列机顶RGB LED灯的亮点在于可以同时利用黄色及白色LED，而且色温范围广，可由2700K-9999K，而且显色度高达CRI 95.黄色及白色LED也可跟RGB LED同时使用，RGB LED可以在基本色温上作三基色饱和度调整。

RGB的LED灯珠可以重0-255调较饱和度。而每一项更可以个位数调整，令用户可以作出精细微调，满足各种不同设定需要。

现时Tagram系列机顶RGB LED灯有两款，分别是30W机顶LED灯，T-8，及50W RGB布灯，T-12。这两款灯都可以运用随机配的球头座安装到不同的摄影器材上，如灯架或相机热靴等等。在小型影室需要经常变换各种设定上，Tagram系列可以做到快速及方便的切换。Tagram系列机顶RGB LED灯同时可使用索尼NP-F电池使用，同时外拍的需求。

Accessories 配件

重型横臂架 FD-5500+JHS-01MC



2.4米移动反光屏 RRK-2424



柔 黑 银 三合一



PRODUCT SPECIFICATION (产品参数)

Model No. 型号	LB-16 & LB-32	U8	RX-748	RX-782
LEDs & Power LED灯泡数及功率	100pcs x 0.5W (16) 200pcs x 0.5W (32)	320pcs x 3W 《80pcs x 4》	4608pcs x 0.5W <白> / 4608pcs x 0.5W <黄> / 4608pcs x 0.3W <彩色>	480pcs x 0.5W <白> / 480pcs x 0.5W <黄> / 480pcs x 0.3W <彩色>
Out put Wattage 输出功率	16W / 32W	800W 《200W x 4》	输出:2400W	输出:200W
Color Temperature 色温	3000K-5600K	3000K-8000K	2700K/5600K	2700K/9999K
Operating Voltage 工作电压	Operating Voltage DC-12V 2A	AC 110-240V 60 HZ/50HZ	AC-110V-240V	AC-110V-240V
Compatibility 兼容性	AC Adaptor 适配器 Battery Capacity 7.4V 24Wh(16) Battery Capacity 7.4V 45Wh(32)	/	AC POWER 交流电 Sony V Mount Battery (DC) V卡口电池座	AC Adaptor Sony V Mount Battery (DC) V卡口电池座
Dimming 调光	0-100% Step-less dimming 0-100%无级调光	0-100% Stepless Dimming 0-100% 3000K-8000K 0-100% 无极调光 色温调控3000K-8000K	0-100% Step-less dimming ON/OFF 开关 Turning Knob 旋钮/触屏	0-100% Step-less dimming ON/OFF 开关 Turning Knob 旋钮
Beam Angle 照射角度	0.5M 65° (16) 1M 65° (32)	23°	114°	66°
Control Function 调控方式	Switch+Turning Knob+Mutual Control 按键+旋钮+遥控	Turning Knob/DMX/Touch Screen /2.4Gremote-RC-3T 旋钮/DMX/触屏/遥控RC-3T	Touch Screen Turning knob DMX 2.4G remote/RC-3T 触屏 旋钮 DMX 2.4G遥控器RC-3T DMX-512/Turning Knob 旋钮/遥控	ON/OFF 开关 点阵液晶显示屏 Mutual Control 互控<只能与此型号> DMX-512/Turning Knob 旋钮/遥控
CRI 显色度	91	综合92/黄光95	91	93
Lux 照度 (0.5m/1m/2m/3m)	LB-16 3000K 0.5M:543 1M:152 2M:42 5600K 0.5M:1200 1M:340 2M: 92 LB-32 3000K 0.5M:727 1M:256 2M: 80 5600K 0.5M:1650 1M:593 2M: 180	3000K(黄光): 1M:53400 2M:18700 3M:9020 5M:3460 7M:1870 9M:1090 5500K(综合): 1M:107000 2M:37700 3M:18300 5M:6720 7M:3620 9M:2220	5600K(配RGB) 0.5M:24100/1M:19800/2M:8240 3M:6060/5M:2580/7M:1380/9M:771 5600K/0.5M:20600/1M:17300/2M:9430 3M:5210/5M:2300/7M:1260/9M:769 2700K/0.5M:18200/1M:16500/2M:8590 3M:5100/5M:2200/7M:1190/9M:728	5600K(配RGB) 0.5M 12500 / 1M 4850 / 2M 1350 5600K 0.5M:13900/1M:5500/2M:1490 2700K 0.5M:12300/1M:4820/2M:1310
Footcandles英尺烛光 (0.5m/1m/2m/3m)	LB-16 3000K 0.5M:50 1M:14 2M:4 5600K 0.5M:112 1M:32 2M:9 LB-32 3000K 0.5M:68 1M:24 2M: 7 5600K 0.5M:153 1M:55 2M: 18	3000K(黄光): 1M:4963 2M:1738 3M:838 5M:322 7M:174 9M:101 5500K(综合): 1M:9944 2M:3504 3M:1701 5M:625 7M:336 9M:206	5600K(配RGB) 0.5M:2240/1M:1840/2M:766 3M:563/5M:240/7M:128/9M:72 5600K/0.5M:1914/1M:1608/2M:876 3M:484/5M:214/7M:117/9M:71 2700K/0.5M:1691/1M:1533/2M:798 3M:474/5M:204/7M:111/9M:68	5600K(配RGB) 0.5M 1162 / 1M 451 / 2M 125 5600K 0.5M 1292 / 1M 511 / 2M 138 2700K 0.5M 1143 / 1M 448 / 2M 122
Mounting Method 安装配套	Grid Handle 手柄	Wire rope钢丝绳	-	-
Dimensions 机身尺寸	600x45.5mm (16) 1200x45.5mm (32)	600mmx600mmx290mm	架子2800x2600x1070mm	-
Weight 重量	0.48KG / 0.93KG	14.6KG	布灯:1.82KGx8 控制盒:3.4KGx8 架子+布: 20.5KG	-
Noise Level(dB) 噪音的分贝强度	/	0.2cm:53dB 0.5cm:49.5dB	/	/
In the box 配件	Carry Bag 布袋 Grid Handle 手柄 Connector连接器 AC Adaptor(12V 2A) 充电器	cylindrical diffusor 圆柱形柔光罩 cylindrical softbox 圆柱形柔光箱	-	-
Optional Accessories 选购配件	1PCS:RC-3T(3000K-5600K) 两个连接件(16) 五个连接件(32) 1PCS:MP-155A 1PCS:WPC-1.6 1PCS:1转3充电器(16) 2PCS:1转3充电器(32) 3角匙连接件(16) 3角匙 4角匙 6角匙连接件各一个(32)	-	-	-