

2018/2019

联星摄影器材

LINKSTAR

PHOTOGRAPHIC EQUIPMENT



联星(香港)有限公司《LINKSTAR (H.K.) LTD.》

香港九龙红磡马头围道39号红磡广场一楼25室  
Unit 25, 1/F., Hung Hom Square, 39 Ma Tau Wai Road,  
Hung Hom, Kowloon, Hong Kong

+852-2186 7580

+852-2186 7635

info@linkstarhk.com

生产商 (Production plant) :

鹰科影视器材厂(YINGKE PHOTOGRAPHIC EQUIPMENT FACTORY)

广东省东莞市凤岗镇黄洞村东深二路东升工业区3号厂房  
3rd Building, Dongsheng Industrial Zone  
(beside The 2nd Dongshen Road), Huangdong Village, Fenggang Town,  
Dongguan City, Guangdong Province, China.



Copyright 2018, Linkstar (HK) Ltd.  
We reserve the rights to make any changes due to technical developments.

联星摄影器材  
LINKSTAR

18  
/  
19

联星摄影器材

LINKSTAR

PHOTOGRAPHIC EQUIPMENT

www.linkstarhk.com





# 联星简介

## ABOUT LINKSTAR

联星（香港）有限公司成立于2003年，并于几年内从一家只有几个员工的公司变成发展迅速健全的影楼设备制造出口商。过去十年，我们一直走在影楼设备的尖端，为专业摄影师和业余摄影爱好者提供最创新最先进的设备和技术。我们活跃于环球各大摄影展览会，除了让来自世界各地的顾客更了解联星，还把我们的新技术和高科技产品带到全世界。我们的分销商遍布全世界，包括美国、荷兰、意大利、西班牙、澳洲、南非、沙地阿拉伯等等。在万变的时代，我们为客人带来先进的产品，满足顾客各种需要。我们不仅积极发展成为世界顶尖数码单反相机配件及影楼设备生产出口商，更着重可持续环保地生产我们每一件产品，负起社会责任。

Linkstar (H.K.) Ltd was founded in 2003, from a Hong Kong based company with just a handful of employees, within years we soon grew into a well-established studio equipment manufacturer and exporter. For the past decade, we have made an amazing progress in producing the most innovative and advanced studio equipment for both professionals and amateurs. We have made frequent appearances in different international photographic fairs and exhibitions to gain exposure and simultaneously show the world our latest hi-tech products. In cooperation with our oversea distributors, Linkstar products are made known and sold worldwide, including but not limited to the US, Holland, Italy, Spain, Australia, South Africa and Saudi Arabia. In the fast changing era, we meet the needs of our customers by introducing the most advanced devices to the market. We strive not only to become as world's top DSLR accessory and studio equipment manufacturer and exporter but also produce our every single product in an environmentally sustainable way, being a socially responsible company. Linkstar - Links Your Vision!



# 2018/2019 LINKSTAR



## 目录 / COLLECTION

- |  |  |
|--|--|
| <p>02 ▶ LED卷布灯<br/>LED FLEX LIGHT</p> <p>07 ▶ LED柔光灯<br/>RL-SERIES LED PANOLITE</p> <p>13 ▶ 珑卡LUCIA<br/>LED小型聚光灯(MINI LED SPOT LIGHT)</p> <p>17 ▶ LED 太阳灯(LED Solar Light)<br/>LES-1000TD &amp; LES-2000TD</p> <p>19 ▶ LED平板柔光灯<br/>LED SOFT PANEL LIGHT</p> <p>23 ▶ LED平板灯<br/>LED PANEL LIGHT</p> <p>28 ▶ LED环形灯<br/>LED RING LIGHT</p> <p>31 ▶ 锂电池<br/>V Mount Battery</p> <p>32 ▶ 白平衡卡<br/>WHITE BALANCE CARD</p> <p>34 ▶ 影室灯<br/>STUDIO LIGHT</p> | <p>40 ▶ 闪光管及灯泡<br/>FLASH TUBE &amp; LIGHT BULB</p> <p>41 ▶ 节能灯系统<br/>FLUORESCENT LIGHT</p> <p>42 ▶ 反光伞<br/>UMBRELLA</p> <p>42 ▶ 易撑柔光箱/雷达罩<br/>FOLDABLE SOFTBOX/FOLDABLE BEAUTY DISH</p> <p>45 ▶ 套装包/反光板<br/>KIT BAG/Reflector</p> <p>46 ▶ 背景架/灯架<br/>BACKGROUND SUPPORT SYSTEM/LIGHT STAND</p> <p>47 ▶ 相机闪光灯配件 SLK-8<br/>SPEEDLITE ACCESSORIES</p> <p>48 ▶ 配件<br/>ACCESSORIES</p> <p>49 ▶ 背景纸<br/>BACKGROUND PAPER</p> |
|--|--|

# LED FLEX LIGHT LED卷布灯

RX-9T / RX-9TD / RX-11TD




联星RX-LED 卷布灯采用了最新的SMD LED技术开发而成，令其产生的光源极其柔和，布灯采用了只有10mm厚度的超薄布料制造，使它可以灵活地卷曲来调整灯光的照射角度。RX-LED 卷布灯轻巧方便携带配合X型支架可将其作为LED平板灯使用。随产品附送魔术贴配件便于不同环境安装使用。

为了方便在拍摄及视频制作上做出不同的效果，RX-LED 卷布灯提供了多款不同功率，色温及尺寸型号给用家选择最适合自己的卷布灯。控制盒背部设置了一个V卡座使用V卡口电池，让外景拍摄更为方便。此外，RX-TD型号植入了“互控”功能，可通过2.4GHz频率于不同频道上遥控操作多个灯光。

Linkstar RX-LED Flex light is developed with the latest SMD LED technology to produce extreme soft light, with 10mm slim cloth material platform it is able to do rolling and flexible movement for any possible light angles. It is handy light weight and easy to setup, with the help of the X-bracket it can be mounted on the light stand as a LED panel. The additional Velcro accessories are included for certain mounting purposes.

The Flex light comes in different models with different sizes, power output, and color setting to aim for all types of production works. There's a V-mount socket built-in at the back of the control unit for using V-mount battery which make it great for on location shooting. In addition, the RX-TD models are implanted with "Mutual Control" feature to remote control multiple lights in different channels through 2.4GHz frequency.

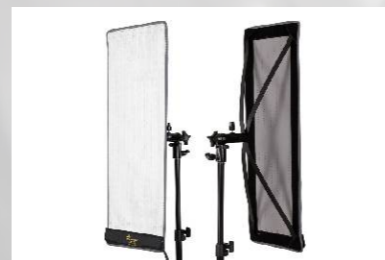

RX-9T



RX-9TD



RX-11TD

## RX-9T





## RX-9TD



型号 Model No.	RX-9T	RX-9TD
No. of LED Bulbs LED 总数	252pcsx0.2W	252pcsx0.5W
Power 功率	40W	50W
Color Temperature 色温	3000K/5600K	3000K - 5600K
CRI 显色度	95	95
Voltage 电压	DC-15V 5A	DC-15V 5A
Dimensions(LxWxH) 尺寸	610x240mm	610x240mm
Net Weight 净重	Light 布灯:0.3KG Control Box控制盒:1.05KG AC Adaptor 5A适配器:0.39KG	



### RX-9TD-K3三灯套装

- RX-9TD x3
- 控制盒Control box x3
- 适配器AC Adaptor x3
- L型转向头L-Tilting Bracket x3
- X型支架X-Frame x3
- B-808 BAG 三支装灯架包 x1
- i-2001/B灯架 x3

### 选购配件 Optional Accessories



RX-9OB(柔光箱)



RX-9SBHC(蜂巢柔光箱)



遥控器RC-6



AD-PS1



NP-F750F



## RX-11TD

型号 Model No.	RX-11TD
No. of LED Bulbs LED 总数	360pcsx0.5W
Power 功率	68W
Color Temperature 色温	3000K - 5600K
CRI 显色度	95
Voltage 电压	DC-15V 7A
Dimension(LxWxH) 尺寸	460x460mm
Net Weight 净重	Light 布灯:0.39KG Control Box控制盒:0.87KG AC Adaptor 7A适配器:0.47KG



### (RX-9TD+RX-11TD)-K3三灯套装

- RX-9TD x2
- RX-11TD x1
- 适配器AC Adaptor x3
- LMC-2100 x3
- 控制盒Control box x3
- L型转向头L-Tilting Bracket x3
- X型支架X-Frame x3
- CC-20套装包 x1

### 选购配件 Optional Accessories



RX-11OB(柔光箱)



RX-11SBHC(蜂巢柔光箱)



遥控器RC-6



AD-PS1



NP-F750F

## PRODUCT SPECIFICATION 产品参数

Model No. 型号			
	RX-9T	RX-9TD	RX-11TD
LEDs & Power LED灯泡数及功率	252pcsx0.2W	252pcsx0.5W	360pcsx0.5W
Out put Wattage 输出功率	40W	50W	68W
Color Temperature 色温	3000K 或 5600K	3000K - 5600K	
Operating Voltage 工作电压	DC-15V 5A		DC-15V 7A
Compatibility 兼容性	AC Adaptor 适配器	Sony V Mount Battery 锂电池 (DC)	
Dimming 调光	0-100% Step-less dimming 0-100% 无极调光	0-100% Step-less dimming 0-100% 无极调光 ON/OFF 开关 Touch Screen 触屏	
Beam Angle 照射角度	10-360°		
Control Function 调控方式	Turning Knob 旋钮	Mutual Control 互控 Touch Screen 触屏	
CRI 显色度	95		
Lux 流明	0.5M:3680 1M:1230 2M: 351	0.5M:4760 1M:1320 2M: 363	0.5M:6540 1M:2020 2M: 513
Footcandles 英尺烛光	0.5M:342 1M:114 2M: 33	0.5M:442 1M:123 2M:34	0.5M:607 1M:188 2M:48
Mounting Method 安装配套	X-Frame+CL-14 X支架+万向接头		
Dimensions 机身尺寸	610×240mm		460×460mm
Weight 重量	Light 布灯:0.3KG Control Box控制盒:1.05KG AC Adaptor 5A适配器:0.39KG		Light 布灯:0.39KG Control Box控制盒:0.87KG AC Adaptor 7A适配器:0.47KG
In the box 配件	Carry Bag 布袋 AC Adaptor 适配器 X-Frame X支架+ CL-14 Control Box 控制盒 Velcro Tape 魔术毛勾贴		
Optional Accessories 选购配件	Softbox 蜂巢柔光箱: RX-9SBHC Light Stand 灯架: LMC-1900/B AD-PS1		Softbox 蜂巢柔光箱: RX-11SBHC Light Stand 灯架: LMC-1900/B AD-PS1

## RL-SERIES LED PANOLITE LED柔光灯

RL-18V/24VC/58MC/62MC/72MC



联星PANOLITE采用了最新的SMD LED技术开发而成，令其不需要额外的柔光配件也能产生出极其柔和的双色光源。

为了方便在拍摄及视频制作上做出不同的效果，PANOLITE 柔光灯提供了多款不同功率，色温，形状及尺寸型号给家用选择最适合自己的柔光灯。控制盒背部设置了F卡座或V卡座配合电池使用，让外景拍摄更为方便。此外，PANOLITE植入了“互控”功能，可通过2.4GHz频率于不同频道上遥控操作多个灯光。

The Linkstar PANOLITE is developed with the new SMD LED technology, providing beautiful soft light in bi-color. It creates extremely soft light and makes extra light modifiers unnecessary.

The PANOLITE comes in different models with different sizes and shapes, power output, and bi-color setting to aim for all types of applications. There is either F-mount or V-mount socket built-in at the back panel for using battery DC power for outdoor shooting. In addition, the PANOLITE is implanted with “Mutual Control” feature to remote control multiple lights in different channels through 2.4GHz frequency.



### RL-18V

色显CRI:95  
色温Color Temperature : 5600K±200K  
流明Lux: 0.5M:1490/1M:389/2M:101  
机身尺寸Size: 290x280x50mm



### RL-18V-K3三灯套装

- 1.LED灯包包  
LED light bag x3
- 2.RL-18V x3
- 3.电源线  
Power Cable x3
- 4.适配器  
AC Adaptor x3
- 5.灯架i-2001/B x3



# RL-24VC



色显CRI:95  
色温Color Temperature :3000-5600K  
流明Lux: 0.5M:1900/1M:504/2M:146  
机身尺寸Size: 370x350x50mm



## RL-24VC-K3三灯套装

- 1.LED灯包包LED light bag x3
- 2.RL-24VC x3
- 3.适配器AC Adaptor x3
- 4.电源线Power Cable x3
- 5.灯架i-2001/B x3



RL-24VC-K3三灯套装

# RL-58MC



色显CRI:95  
色温Color Temperature : 3000-5600K  
流明Lux: 0.5M:4850/1M:1360/2M:361  
机身尺寸Size: 590x570x60mm



遥控器RC-6  
(选购配件 Optional Accessories)



## RL-58MC-K3三灯套装

- 1.LED灯包包LED light bag x3
- 2.RL-58MC x3
- 3.绑带Adaptor band x3
- 4.适配器AC Adaptor x3
- 5.电源线Power Cable x3
- 6.灯架i-2601/M x3




RL-58MC-K3三灯套装


## PRODUCT SPECIFICATION 产品参数

Model No. 型号	RL-18V	RL-24VC	RL-58MC
LEDs & Power LED灯泡数及功率	90pcs x 0.5W	120pcs x 0.5W	300Pcs x 0.5W
Out put Wattage 输出功率	18W	24W	58W
Color Temperature 色温	5600K±200K	3000K-5600K	
Operating Voltage 工作电压	DC-9V 3A	DC-12V 3A	DC-15V 5A
Compatibility 兼容性	AC Adaptor适配器	Sony F Mount Battery 锂电池	AC Adaptor适配器 Sony F Mount Battery锂电池 (x2) Sony V Mount Battery(DC)V卡口电池座
Dimming 调光	0-100% Step-less dimming 0-100% 无极调光		
Beam Angle 照射角度	56°	62°	64°
Control Function 调控方式	Turning Knob 旋钮 Mutual Control 互控 点阵液晶屏 2.4G remote(RC-3T) 2.4G遥控器 (RC-3T)		
CRI 显色度	95		
Lux 流明	0.5M:1490 1M:389 2M:101	0.5M:1900 1M:504 2M:146	5600K: 0.5M:4850 1M:1360 2M:361 3000K: 0.5M:4290 1M:1200 2M:315
Footcandles 英尺烛光	0.5M:138 1M:36 2M: 9	0.5M:177 1M:47 2M:14	5600K: 0.5M:451 1M:126 2M:34 3000K: 0.5M:399 1M:112 2M:29
Mounting Method 安装配套	U-Bracket U架		
Dimensions 机身尺寸	290x280x50mm	370x350x50mm	590x570x60mm
Weight 重量	0.7KG	1.2KG	3.07KG
In the box 配件	U-Bracket U架 Carry Bag 布袋 Adaptor DC-9V 3A 适配器DC-9V 3A	U-Bracket U架 Carry Bag 布袋 Adaptor DC-15V 3A 适配器DC-15V 3A	U-Bracket U架 Carry Bag 布袋 Adaptor DC-15V 5A 适配器DC-15V 5A
Optional Accessories 选购配件	Sony F-mount Li-ion Battery 锂电池: NP-F750F Battery Charger 充电器:SP-CHG Li-ion Battery 锂电池: BP-130L 锂电池充电器FC-B1 互控遥控器RC-6		


## RL-62MC

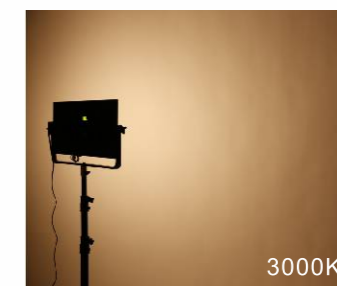

3000K



5600K

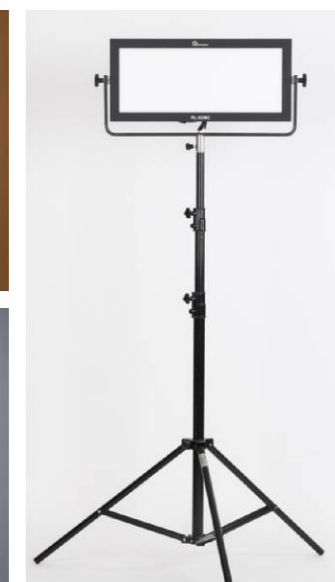


色显CRI:95  
色温Color Temperature:3000-5600K  
流明Lux: (5600K)0.5M:4020/1M:1150/2M:309  
(3000K)0.5M:3810/1M:1070/2M:285  
机身尺寸Size: 640x34x70mm




遥控器RC-6  
(选购配件 Optional Accessories)


## RL-72MC



3000K



5600K

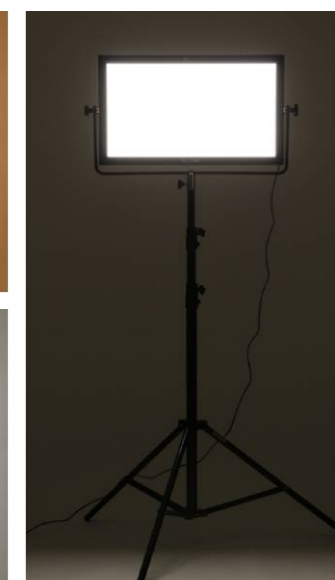

色显CRI:95  
色温Color Temperature : 3000-5600K  
流明Lux: (5600K)0.5M:4630/1M:1380/2M:373  
(3000K)0.5M:4200/1M:1250/2M:338  
机身尺寸Size: 690x43x70mm

## PRODUCT SPECIFICATION 产品参数

Model No. 型号	RL-62MC	RL-72MC
LEDs & Power LED灯泡数及功率	300Pcs×0.5W	360Pcs×0.5W
Out put Wattage 输出功率	62W	72W
Color Temperature 色温	3000K-5600K	3000K-5600K
Operating Voltage 工作电压	DC-15V 5A	DC-15V 7A
Compatibility 兼容性	AC Adaptor适配器 Sony F Mount Battery锂电池 (x2) Sony V Mount Battery(DC)V卡口电池座	
Dimming 调光	0-100% Step-less dimming 0-100% 无极调光	
Beam Angle 照射角度	64°	
Control Function 调控方式	Turning Knob 旋钮 Mutual Control 互控 2.4G remote(RC-3T) 2.4G遥控器 (RC-3T) 点阵液晶屏	
CRI 显色度	95	
Lux 流明	5600K: 0.5M:4020 1M:1150 2M:309 3000K: 0.5M:3810 1M:1070 2M:285	5600K: 0.5M:4630 1M:1380 2M:373 3000K: 0.5M:4200 1M:1250 2M:338
Footcandles 英尺烛光	5600K: 0.5M:374 1M:107 2M:29 3000K: 0.5M:354 1M:99 2M:26	5600K: 0.5M:430 1M:128 2M:35 3000K: 0.5M:390 1M:116 2M:31
Dimensions 机身尺寸	640x340x70mm	690x430x70mm
Weight 重量	2.75KG	3.55KG
In the box 配件	U-Bracket U架 Carry Bag 布袋 Adaptor DC-15V 5A 适配器DC-15V 5A	U-Bracket U架 Carry Bag 布袋 Adaptor DC-15V 7A 适配器DC-15V 7A
Optional Accessories 选购配件	Sony F-mount Li-ion Battery 锂电池: NP-F960F Battery Charger 充电器:SP-CHG Li-ion Battery 锂电池: BP-130L 锂电池充电器FC-B1 互控遥控器RC-6	



## 珑卡LUCIA

联星LUCIA小型LED聚光灯是一款适用于采访，工作影室及外景拍摄的灯具，这要归功于其轻巧轻便的尺寸。简易操作是LUCIA的重点；它们配备了直流电源的V型或F型卡座，以消除没有交流电源插座时的拍摄限制。

L-3的设计让其能够于16° -45° 任意调整光束角度，并且可以安装在灯架上使用，而L-1.5的尺寸非常小巧所以可直接安装于相机顶上使用。LUCIA具有照明质量高显色CRI 95+的专业级别，用户可挑选3000K或5600K色温灯具，并提供双灯/三灯套装来满足各种拍摄要求。


The Linkstar LUCIA mini LED Fresnel is a perfect light fixture for on location production, small studio, and interviewing, thanks to its lightweight and handy size. User friendly is the main goal for LUCIA; they are built with either V-mount / F-mount socket for DC power to eliminate filming restriction where power outlet is not available.

L-3 is capable to adjust beam angle from 16° -45° and can be mounted on light stand use, whereas L-1.5 is designed as an on camera light due to its handy size. Professional level of lighting quality CRI Ra 95+ is a basic for Lucia, available in either 3000K Tungsten or 5600K Daylight fixtures, and with two-light / three-light kits being offered, they could fulfill all kinds of filming requirements.





# LED小型聚光灯 珑卡LUCIA MINI LED SPOT LIGHT

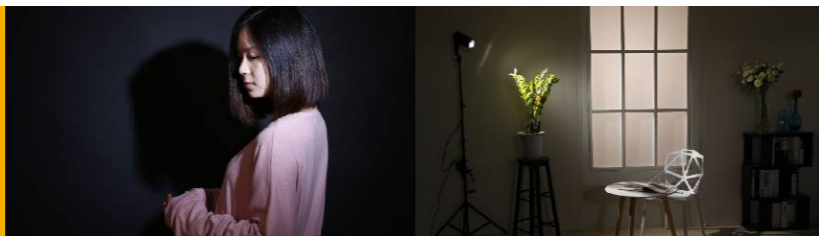


L-1.5

## L-1.5-K1 标配套装



- 1: L-1.5 x1
- 2: L3-BD1挡光板 x1
- 3: MBH-5B金属云台 x1
- 4: SP-CHG锂电池充电器 x1
- 5: Power Cable电源线 x1
- 6: NP-F550锂电池 x1

## 选购配件 Optional Accessories

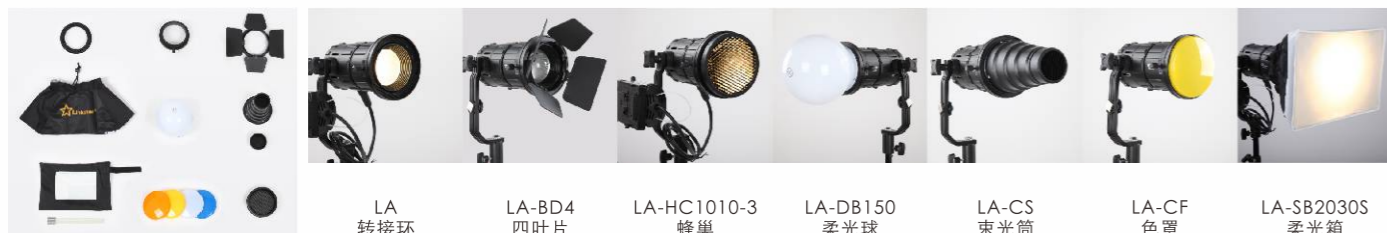

LA-K7

- LA 转接环
- LA-BD4 四叶片
- LA-HC1010-3 蜂巢
- LA-DB150 柔光球
- LA-CS 束光筒
- LA-CF 色罩
- LA-SB2030S 柔光箱

## L-3



色显CRI:95  
色温Color Temperature : 3000K / 5600K  
流明Lux :  
散光 Flood(3000K)0.5M:9830/1M:2430/2M:606  
(5600K)0.5M:9420/1M:2310/2M:591  
聚光 Focus(3000K)0.5M:18400/1M:7040/2M:1800  
(5600K)0.5M:34700/1M:8290/2M:2130  
机身尺寸Size: 263x141mm



## L-3-K3三灯套装

- L-3 x3 控制盒 Control Box x3 适配器 AC Adaptor x3 电源线 Power Cable x3
- L-A7 x1 灯架 i-2501/B x3 三支装灯架包B-808 BAG x3 套装箱CC-30 x1



## 选购配件 Optional Accessories



i-2501/B

BP-130L  
<14.8V/130Wh/8800mAh>  
Sony-mount

锂电池充电器FC-B1

NP-F960F  
SP-CHG

AD-PS1

L3-BD1 挡光板

## PRODUCT SPECIFICATION 产品参数

Model No. 型号		
	L-1.5	L-3(3000K) / L-3(5600K)
LEDs & Power LED灯泡数及功率	1pcs x 15W	1pcs x 30W
Out put Wattage 输出功率	15W	30W
Color Temperature 色温	5600K	3000K / 5600K
Operating Voltage 工作电压	DC-7.4V	DC-15V 5A
Compatibility 兼容性	Sony F Mount Battery 锂电池	AC Adaptor 适配器 Sony V Mount Battery (DC) V卡口电池座
Dimming 调光	0-100% Stepless Dimming 0-100% 无极调光	
Beam Angle 照射角度	47°	20°-44°(3000K) 16°-45°(5600K)
Control Function 调控方式	Turning Knob 旋钮 ON/OFF 开关	
CRI 显色度	95	
Lux 流明	0.5m 4446 / 1m 1276 / 2m 314 (FLOOD 散光)	3000K 散光: 0.5m 9830 / 1m 2430 / 2m 606 聚光: 0.5m 18400 / 1m 7040 / 2m 1800 5600K 散光: 0.5m 9420 / 1m 2310 / 2m 591 聚光: 0.5m 34700 / 1m 8290 / 2m 2130
Footcandles 英尺烛光	0.5m 413 / 1m 119 / 2m 29 (FLOOD 散光)	3000K 散光: 0.5m 914 / 1m 226 / 2m 56 聚光: 0.5m 1710 / 1m 654 / 2m 167 5600K 散光: 0.5m 875 / 1m 215 / 2m 55 聚光: 0.5m 3225 / 1m 770 / 2m 198
Mounting Method 安装配套	MBH-5B多功能金属云台	L-Bracket L架
Dimensions 机身尺寸	100x112mm	263x141mm
Weight 重量	0.57KG	1.55KG
In the box 配件	NP-F550锂电池 SP-CHG MBH-5B金属云台 L3-BD1挡光板 Carry Bag 布袋	L-Bracket L架 Carry Bag 布袋 Adaptor DC-15V 适配器DC-15V V-Mount battery plate V卡口电池座
Optional Accessories 选购配件	LA-K7	Light Stand 灯架: i-2501/B LA-K7 L3-BD1 挡光板



联星LES-TD系列是一款双色LED影室灯，具有照明质量高显色CRI95+的专业级别。灯体配备了保荣 (Bowens) 连接卡座，使其可以装配不同调光配件，如柔光箱，反光罩，束卷筒等等。


亮度及色温 (3000K-8000K) 可通过轻触式屏幕或旋钮进行调节。令人惊叹的是它可以通过Wi-Fi信号把智能手机连接到手机程式(APP)来遥控操作灯光设置。

苹果IOS及安卓Android版本手机程式(APP) 已可供下载。

The Linkstar LES-TD series LED Studio Light is a bi-color LED lamp with professional level of lighting quality CRI 95+. It is equipped with Bowens Bayonet for mounting with different light modifiers as softbox, reflector, snoot, etc.

Dimmer and color temperature (3000K - 8000K) is adjustable via touch screen or knobs. A stunning feature is that it can be connected through Wi-Fi to remote control the light setting with smartphone. APPs are available to download for both IOS and android version.

LED SOLAR LIGHT  
LED 太阳灯  
LES-1000TD & LES-2000TD

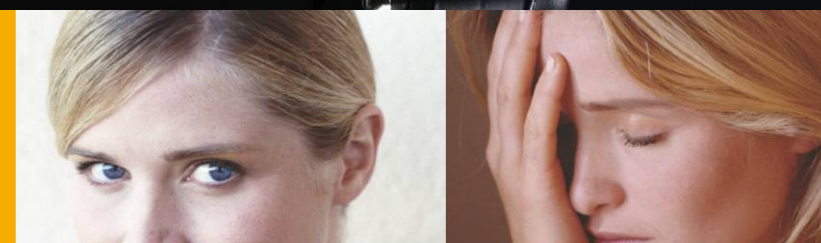



LES-1000TD



LES-2000TD



SP-DBSY 便携式电源插座 Portable Power Socket (LES-1000TD)

型号 Model No.	LES-1000TD	LES-2000TD
No. of LED Bulbs LED 总数	1pcsx100W	1pcsx200W
Power 功率	100W	200W
Color Temperature 色温	3000K-8000K	3000K - 8000K
CRI 显色度	95	95
Voltage 电压	AC-100V-240V	AC-100V-240V
Noise Level (dB) 噪音的分贝强度	0.2M:39.5dB 0.5M:35.8dB	0.2M:49.7dB 0.5M:42.1dB
Lux 流明	5500K / 0.3M 79810 / 0.5M 45900 / 1M 5810 / 2M 1040 / 3M 440 3000K / 0.3M 33073 / 0.5M 16000 / 1M 2390 / 2M 432 / 3M 183	5500K / 0.5M 129687 / 1M 24781 / 2M 5506 / 3M 2423 3000K / 0.5M 62403 / 1M 11655 / 2M 2594 / 3M 1144
Footcandles 英尺烛光	5500K / 0.3M 7417 / 0.5M 4266 / 1M 540 / 2M 97 / 3M 41 3000K / 0.3M 3074 / 0.5M 1487 / 1M 222 / 2M 40 / 3M 17	5500K / 0.5M 12053 / 1M 2303 / 2M 726 / 3M 225 3000K / 0.5M 5800 / 1M 1083 / 2M 241 / 3M 106
Dimension(LxWxH) 尺寸	525×220×130mm	616×220×130mm
Weight 重量	3.27kg	3.61kg
Control Feature 控制功能	Wi-Fi	Wi-Fi

Wi-Fi 智能控制手机APP  
Wi-Fi Smartphone Control APP



苹果端下载  
IOS download



安卓版下载  
Android download

选购配件 Optional Accessories



BP-130L  
<14.8V/130Wh/8800mAh>  
Sony-mount

锂电池充电器  
FC-B1

聚光筒  
LPSA-BOF

十六角柔光箱  
PSB-9

柔光球  
FTA-DF65

i-2601/M



LED平板柔光灯

联星LED-TDX柔光灯采用了特别的柔光技术，借助纯白柔光板可轻易地打出优美的柔光光源，从此不再需要携带额外的柔光配件到户外拍摄。

DMX-512系统是标准配置使其可通过DMX控制器控制亮度及色温。机背设置了一个V卡座使用V卡口电池取电，可按情况选择使用交流或直流电源。凭借其强大的双色光源输出和高CRI显色读数Ra 95+，毫无疑问地LED-TDX是室内和室外应用的最佳选择。

The Linkstar LED-TDX soft light panel is manufactured by the latest soft light technology with the help of its pure white diffuser plate which could easily creates shadow-free soft light, additional soft light modifiers are no longer needed for on location work.

DMX-512 system is a standard feature for controlling dimmer/color through the DMX controller. There is also a V-mount socket built-in at the back panel to allow using either AC or DC power. With its powerful, variable bi-color light output, and high CRI reading of Ra 95+ to assure its lighting quality, it's no doubt the LED-TDX is the best option for both studio and outdoor applications.

# SOFT LIGHT LED柔光灯

LED-100TDX / LED-150TDX



## LED-100TDX

SOFT 柔  
LIGHT 光



色显CRI:95  
色温Color Temperature:3000-5600K  
流明Lux: 0.5M:9790/1M:2350/2M:615  
机身尺寸Size: 455x240x101mm



### LED-100TDX-K2两灯套装

LED-100TDX摄像灯 2套  
i-2601/M灯架 2支  
YK-003A太空铝箱 1个  
CRK-80五合一反光板 1套  
B-8510 BAG  
两支装灯架包 1个



### LED-100TDX-K3三灯套装


LED-100TDX摄像灯 3套  
i-2601/M灯架 3支  
YK-002A太空铝箱 1个  
CRK-80五合一反光板 1套  
B-8510 BAG  
三支装灯架包 1个

## LED-150TDX

SOFT 柔  
LIGHT 光



3000K



5600K



色显CRI:95  
色温Color Temperature:3000- 5600K  
流明Lux: 0.5M:16000/1M:4130/2M:1010  
机身尺寸Size: 455x340x101mm



### LED-150TDX-K2两灯套装

LED-150TDX摄像灯 2台套  
i-2601/M灯架 2支  
YK-003A太空铝箱 1个  
CRK-80五合一反光板 1套  
B-8510 BAG  
两支装灯架包 1个



### LED-150TDX-K3三灯套装

LED-150TDX摄像灯3台  
i-2601/M灯架 3支  
YK-002A太空铝箱 1个  
CRK-80五合一反光板1套  
B-8510 BAG  
三支装灯架包1个

## 选购配件 Optional Accessories



BP-130L  
<14.8V/130Wh/8800mAh>  
Sony-mount



锂电池充电器FC-B1  
(for LED-100TDX)




i-2601/M



遥控器RC-3T



YK-003A



YK-002A

# PRODUCT SPECIFICATION 产品参数

Model No. 型号	 <b>LED-100TDX</b>	 <b>LED-150TDX</b>
	LEDs LED灯泡数	504pcs x 0.5W
Wattage 功率	100W	150W
Color Temperature 色温	3000K-5600K	
Operating Voltage 工作电压	DC-15V 7A	DC-15V10A
Compatibility 兼容性	AC Adaptor适配器 Sony V Mount Battery (DC) V卡口电池座	
Dimming 调光	0-100% Step-less dimming 0-100%无极调光 Color Temperature色温 3000K-5600K	
Beam Angle 照射角度	62°	
Control Function 调控方式	Turning Knob 旋钮 Touch Screen 触屏 WiFi Application 无线WIFI DMX-512	
CRI 显色度	95	
Lux (0.5M / 1M / 2M) 流明(0.5M / 1M / 2M)	0.5M:9790 1M:2350 2M: 615	0.5M:16000 1M:4130 2M: 1010
Footcandles 英尺烛光	0.5M:910 1M:218 2M: 57	0.5M:1487 1M:384 2M: 94
Mounting Method 安装配套	U-Bracket U架	
Dimensions 机身尺寸	455x240x101mm	455x340x101mm
Weight 重量	3.6KG	3.8KG
Noise Level (dB) 噪音的分贝强度	0.2M:36.7dB 0.5M:34.7dB	0.2M:35dB 0.5M:34dB
In the box 配件	AC Adaptor 适配器DC-15V U-Bracket U架 Carry Bag 布袋 Reflector 反光布	
Optional Accessories 选购配件	V Mount Battery 锂电池:BP-130L Light Stand: i-2601/M	Light Stand: i-2601/M



Linkstar LEP-C系列-采用传统双色LED灯泡提供高显色Ra95+的高品质光源照明，具有充足的功率输出，并且可在3000K-5600K之间任意调整色温，各种日常拍摄所需的功能都应有尽有。

LEP-C系列标配了挡光板辅助控制光源，提供不同尺寸，功率型号（和套装）给用户选择最适合自己的拍摄需求。机背设置了V卡座使用V卡口电池取电，让外景拍摄更为方便。

The Linkstar LEP-C series - Bi-color LED panel with traditional LED bulbs produce high quality lighting of CRI Ra 95+, with sufficient power output, and adjustable color temperatures between 3000K-5600K, it is all you need for the daily filming.


The LEP-C series comes standard with barn-door for light modifying, it is offered in different models (and kits) with different sizes and power output to aim for all types of applications. There is a V-mount socket built-in at the back panel for using DC battery power which makes outdoor shooting easier than ever.

## LED PANEL LIGHT LED平板灯

·LEP-748C ·LEP-1012C ·LEP-1496C



# LEP-748C

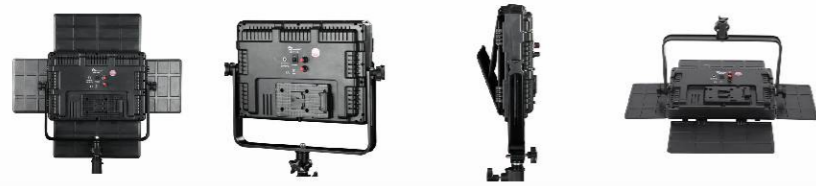

色显CRI:95  
色温Color Temperature:3000-5600K  
流明Lux: 0.5M:13000/1M:4000/2M:400  
机身尺寸Size: 355x240x64mm



## LEP-748C-K2两灯套装

LEP-748C摄像灯 2套  
i-2501/B灯架 2支  
CC-30摄影箱 1个  
CRK-80五合一反光板 1套  
B-808 BAG  
两支装灯架包 1个



## LEP-748C-K3三灯套装

LEP-748C摄像灯 3套  
i-2501/B灯架 3支  
CC-30摄影箱 1个  
CRK-80五合一反光板 1套  
B-808 BAG  
三支装灯架包 1个

### 选购配件 Optional Accessories



NP-F960F  
SP-CHG

AD-PS1

BP-130L  
<14.8V/130Wh/8800mAh>  
Sony-mount

锂电池充电器FC-B1

CC-30

# LEP-1012C



色显CRI:95  
色温Color Temperature:3000-5600K  
流明Lux: 0.5M:19000/1M:6000/2M:700  
机身尺寸Size: 455x240x64mm



## LEP-1012C-K2三灯套装

LEP-1012C摄像灯 2套  
i-2601/M灯架 2支  
YK-003太空铝箱 1个  
CRK-80五合一反光板 1套  
B-8510 BAG  
两支装灯架包 1个



## (LEP-1012C+LEP-1496C)-K3三灯套装

LEP-1496C摄像灯 1套  
LEP-1012C摄像灯 2套  
i-2601/M灯架 3支  
YK-002A太空铝箱 1个  
CRK-80五合一反光板 1套  
B-8510 BAG  
三支装灯架包 1个

### 选购配件 Optional Accessories



NP-F960F  
SP-CHG

AD-PS1

BP-130L  
<14.8V/130Wh/8800mAh>  
Sony-mount

锂电池充电器FC-B1

YK-003

YK-002A

# LEP-1496C



色显CRI:95  
色温Color Temperature:3000-5600K  
流明Lux: 0.5M:23000/1M:8000/2M:900  
机身尺寸Size: 455x350x64mm



### LEP-1496C-K2两灯套装

LEP-1496C摄像灯 2套  
i-2601/M灯架 2支  
YK-003太空铝箱 1个  
CRK-80五合一反光板 1套  
B-8510 BAG  
两支装灯架包 1个



### LEP-1496C-K3三灯套装

LEP-1496C摄像灯 3套  
i-2601/M灯架 x3支  
YK-002A铝箱 1个  
CRK-80五合一反光板 1套  
B-8510 BAG  
三支装灯架包 1个

## 选购配件 Optional Accessories



BP-130L  
<14.8V/130Wh/8800mAh>  
Sony-mount



锂电池充电器FC-B1



i-2601/M



YK-003



YK-002A

## PRODUCT SPECIFICATION 产品参数

Model No. 型号	LEP-748C	LEP-1012C	LEP-1496C
LEDs & Power LED灯泡数及功率	748pcsx0.06W	1012pcsx0.06W	1496pcsx0.06W
Out put Wattage 输出功率	45W	60W	90W
Color Temperature 色温	3000K - 5600K		
Operating Voltage 工作电压	DC-14.8V 5A		DC-14.8V 7A
Compatibility 兼容性	AC Adaptor 适配器 Sony V Mount Battery(DC) V卡口电池座		
Dimming 调光	0-100% Step-less dimming 0-100% 无极调光		
Beam Angle 照射角度	45°		
Control Function 调控方式	Turning Knob 旋钮		
CRI 显色度	95		
Lux 流明	0.5M:13000 1M:4000 2M:400	0.5M:19000 1M:6000 2M:700	0.5M:23000 1M:8000 2M:900
Footcandles 英尺烛光	0.5M:1208 1M:372 2M:37	0.5M:1766 1M:558 2M:65	0.5M:2138 1M:743 2M:84
Mounting Method 安装配套	U架 U-Bracket		
Dimensions 机身尺寸	355 x 240 x 64 mm	455 x 240 x 64 mm	455 x 350 x 64 mm
Weight 重量	3kg	4.5kg	4.8kg
In the box 配件	橙色片Orange Filter、白色片Diffuser、挡光板Barndoor、反光贴片Reflector、U架 U-Bracket、适配器AC Adapter、包包Carrying Bag		
Optional Accessories 选购配件	Battery Converter 电池转换器AD-PS1 V Mount Battery 锂电池:BP-130L Aluminium Boxes 铝箱 : YK-003		V Mount Battery 锂电池:BP-130L Aluminium Boxes 铝箱 : YK-003



联星RLE-VC/FLC系列是具有时尚设计感的环形灯，非常适合用于拍摄肖像，特写照片及视频制作。


RLE-322VC LED环形灯采用双色SMD灯泡提供高显色Ra 95+的高品质光源照明，而FLC-55(荧光灯)则使用高频输出的节能环形泡令视频制作更而稳定流畅。环形灯具有充足的功率输出，并且可在3000K-5600K色温之间任意调整（只限RLE-VC），各种视频拍摄所需的功能都应有尽有。灯具重量只有1.3公斤，因此方便随身携带于外景拍摄。柔光罩是标准配件助你能够轻易制造出柔和光源。

The Linkstar RLE-VC / FLC series are the ring lights with modern design that lead themselves perfectly for portrait, close-up photo and video filming.

The RLE-322VC (LED) ring light is built with bi-color SMD LED bulbs produces high quality lighting of CRI Ra 95+, while FLC-55 (fluorescent) outputting high frequency light source to promise for flicker-free filming. With sufficient power output and adjustable color temperatures between 3000K-5600K (RLE-VC only), it is all you need for all photo shooting and filming. The light fixtures weight only 1.3 kg and therefore it's easy to carry along with you on location. Diffuser is included as standard accessory for light modifying.

# LED环形灯

RLE-322VC/FLC-55

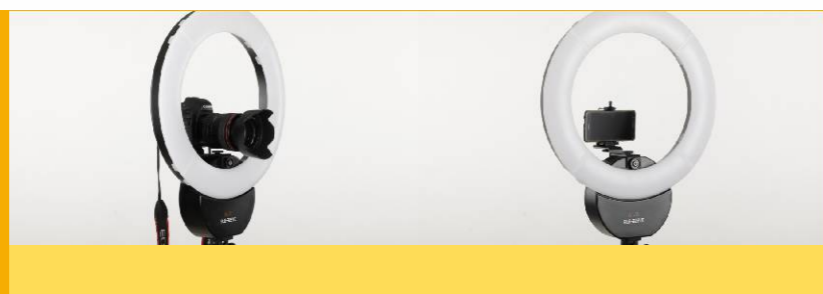


## RLE-322VC



色显CRI:95  
 色温Color Temperature:3000-5600K  
 流明Lux: (5600K)0.5M:2020/1M:580/2M:160  
 (3000K)0.5M:1740/1M:518/2M:132  
 机身尺寸Size: 615x422x72mm



### 产品细节

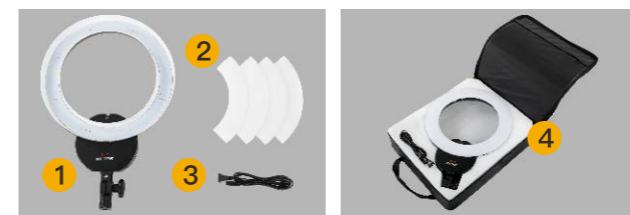

### RLE-322VC清单

- 1.RLE-322VC
- 2.白色柔光片White Diffuser
- 3.电源线Power Cable
- 4.包包Bag



## FLC-55



### FLC-55清单

- 1.FLC-55
- 2.白色柔光片White Diffuser
- 3.电源线Power Cable

色显CRI:93  
 色温Color Temperature:5600K  
 流明Lux: (无色片)0.5M:3200/1M:1000/2M:257  
 (有色片)0.5M:1900/1M:586/2M:124  
 机身尺寸Size: 615x422x72mm



# PRODUCT SPECIFICATION 产品参数

Model No. 型号		
	RLE-322VC	FLC-55
Out put Wattage 输出功率	32W	55W
Light Source 光源	LED	Fluorescence
Color Temperature 色温	3000-5600K	5600K
Operating Voltage 工作电压	100V-240V	220V-240V 100V-120V
Dimming 调光	Color Temperature色温 3000K-5600K	ON/OFF 开关
Beam Angle 照射角度	64°	
Control Function 调控方式	ON/OFF 开关 Turning Knob 旋钮	—
CRI 显色度	95	93
Lux 流明	3200K / 0.5M 1740 / 1M 518 / 2M 132 5600K / 0.5M 2020 / 1M 580 / 2M 160	5500K / 0.5M 3200 / 1M 1000 / 2M 257 <无色片> 5500K / 0.5M 1900 / 1M 586 / 2M 124 <有色片>
Footcandles 英尺烛光	3200K / 0.5M 162 / 1M 48 / 2M 12 5600K / 0.5M 189 / 1M 54 / 2M 15	5500K / 0.5M 297 1M 93 / 2M 24 <无色片> 5500K / 0.5M 176 / 1M 54 / 2M 12 <有色片>
Dimensions 机身尺寸	615×422×72mm	
In the box 配件	White Diffusor 白色柔光片 Bag包包	White Diffusor 白色柔光片
Optional Accessories 选购配件	Warm light diffusor暖光色片 2 meter light stand 2米灯架 Mobile phone holder手机支架 Camera bracket相机支架 TMB-20Z	

# V Mount Battery 锂电池



BP-130L  
<14.8V/130Wh/8800mAh>Sony-mount



## 两电一套 BL-130L-K2



BP-130L锂电池 x2  
FC-B1 Charger充电器 x2

## 三电一套 BL-130L-K3



BP-130L锂电池 x3  
FC-B1 Charger充电器 x3

# 白平衡卡

CA-WB1012 &  
CA-WB1519

PATENT  
PRODUCT!  
专利产品!


联星白平衡卡由德国设计师设计，是一款用特殊光学材料制成的滤卡。拍摄时只需将相机镜头对准它（请使用手动对焦模式）进行拍摄，就可以瞬间把周边环境的光线完全模糊化，使数码相机在复杂光线环境下进行白平衡校正，所拍摄影像作为参数，以此作为当时所处现场的拍摄依据，来设定相机的白平衡。是数码摄影、摄像的理想助手。

Designed by a German designer, CA-WB1012 & CA-WB1519 are a white balance card made of special optical materials. Having the camera switched to manual focus mode, it needs only to be placed snugly in front of the lens and it instantly blurs all light sources which helps the camera to detect correct white balances for the current environment. The white balance card is an ideal partner for digital photography and video recording.



# 白平衡卡

WHITE BALANCE CARD

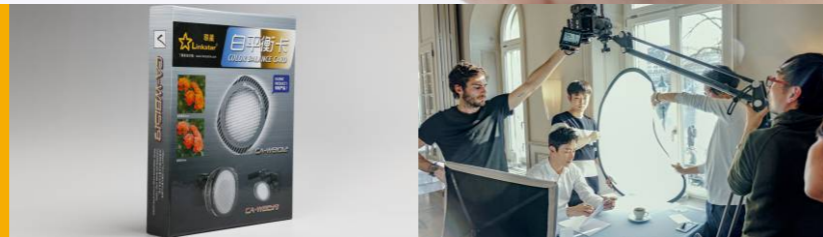

使用前 Before



使用后 After

## CA-WB1012

直径 Dia. 85mm


- 85mm以下的口径镜头都可以使用。
- 贴紧相机镜头设置方法简单方便。
- Compatible with lenses under 85mm
- Handy usage-place snugly in front of the camera




## CA-WB1519

直径 Dia. 135mm

- 135mm以下的口径镜头都可以使用。
- 贴紧相机镜头设置方法简单方便。
- Compatible with lenses under 135mm
- Handy usage-place snugly in front of the camera

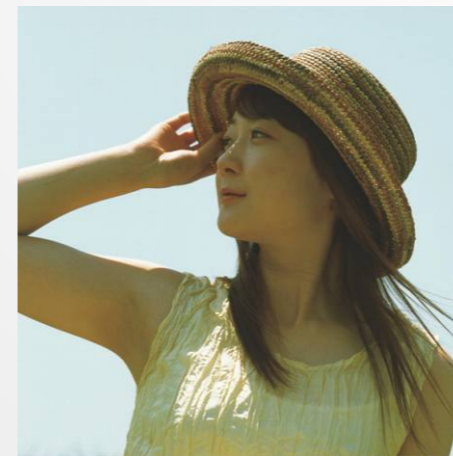

使用前 Before

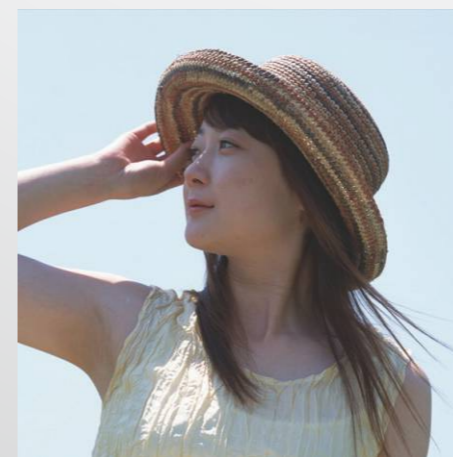

使用后 After



PATENT  
PRODUCT!  
专利产品!



# LF-L Series



光同步Remote Sensor

LCD显示LCD Display

Menu Button功能键

Enter Button输入按钮

Remote Channel 遥控频道

Power Socket电源插孔



Ready Indicator充电指示

试闪键Test Button

休眠显示Sleep Indicator

调光旋钮Variable Switch

Fuse保险丝

Power Switch主开关

Sync Socket同步线插孔

RM-2L  
Wireless Remote Control  
2.4G 无线遥控器

LCD Display LCD 液晶显示

Power up/down 功率增加/减少

Menu 主菜单

Main Power Switch 电源开关

USB Recharging Socket 充电插孔



Test Button  
闪光测试按钮

Emission Button  
信号发射键

Enter 决定键

LED LED灯开关

Hot Shoe热靴座

Model型号	LF-400L	LF-500L	LF-1000L
PowerOutput输出功率	400Ws	500Ws	1000Ws
GuideNo. 闪光指数	60	70	98
PowerControl调光	1/32to1Full全功率(1.0-6.0), Stepless无级调光		
ModelingLamp造型灯	250W		
FlashDuration闪光时间	1/700sec.		
RechargeTime回电时间	1-2sec	1-2sec	1-3sec
IlluminationAngle照射角度	55°		
ACPowerSupply电源	AC100-120V/60Hz/AC220-240V/50Hz		

# Flash Kit 影室灯套装

## LF-L系列影室灯

LF-L系列LCD液晶屏闪光灯采用铝合金高强度工程塑料外壳, 美观时尚、坚固耐用; CPU数控电路设计、超大尺寸LCD液晶面板显示、多功能选择方向触控按键使用方便、输出精度1%、功率调节范围1/1-1/32、极速回电时间快至秒、闪光持续时间可达到 1/260秒、6级的调光系统保证色温控制在标准范围内; 内部合理的空气导流设计配合大功率风机和过热报警保护系统, 保证闪光灯在工作的同时第一时间有效保护内部电路、提高使用寿命。适用于专业摄影领域, 是大中型婚纱影楼、广告摄影、实景专业影棚的完美选择。

The LF-L studio flash offers a wide LCD display with a sophisticated body design. The LCD displays the flash settings in clarity and also eliminates the needs of the traditional button and switches.



LF-L KIT					
LFK-500L	2 x LF-500L	2 x LS-806	1 x RS-6090	1 x PUR-102T	1 x Color Box彩盒
LFK-1000L	2 x LF-1000L	2 x LS-806	1 x RS-80100	1 x PUR-102T	1 x Color Box彩盒

Remarks: RS-6090 (60 x 90cm) PUR-102T (Translucent, 102cm) LS-806 (114-260cm) RS-80100 (80 x 100cm)

## 选购配件 Optional Accessories



LFA-CS

LFA-OS

LFA-SB

LFA-HC

LFA-SR

LFA-BD

IR-1

LAT-16G  
(2.4GHz)

PUR-84T

FR/R

KC-101

G-007

LBA-1

B-1020

BS-3031

# LF-D Series



**PATENT PRODUCT!**  
专利产品!



Model型号	LF-250D	LF-500D	LF-750D	LF-1000D
PowerOutput输出功率	250Ws	500Ws	750Ws	1000Ws
GuideNo.闪光指数	48	70	82	98
PowerControl调光	1/32to1Full全功率, Stepless无档			
ModelingLamp造型灯	150W		250W	
FlashDuration闪光时间	1/700sec.			
RechargingTime回电时间	1-2sec.	1-3sec.	1-4sec.	
Illumination Angle照射角度	55°			
ACPowerSupply电源	AC220-240V50Hz/AC110-120V60Hz			

光同步 Remote Sensor

Modeling Lamp Full/Var Switch造型灯控制键

Modeling Lamp Switch造型灯开关

Power Switch主开关

Ready Indicator充电指示

Fuse保险丝

Power Socket电源插孔



光控开关 Remote Switch

蜂鸣器开关 Beeper Switch

LED显示 LED Display

试闪键 Test Button

调光旋钮 Variable Switch

同步线插孔 Sync Socket

# Flash Kit 影室灯套装

## LF-D系列影室灯

LF-D系列数码显示摄影灯是联星其中一款最新产品。它拥有许多优点，包括回电速度快，也有过热保护系统、调光范围大、数码显示、微型计算机控制、高准确度、携带方便等等。在任何场所都易于设置和使用。它的专业质量、可靠性、稳定性使它成为专业摄影师与业余摄影爱好者的最佳伙伴。

The LF-D Series studio kit creates a very easy-to-use and effective two-light setup, the kit includes a soft box together with a translucent umbrella. The umbrella is perfect for portraiture and many still-life applications. Everything is packed into a single light weight and sturdy color box for easy transportation.



LF-D KIT					
LFK-250D	2 x LF-250D	2 x LS-805	1 x RS-6090	1 x PUR-102T	1 x Color Box彩盒
LFK-500D	2 x LF-500D	2 x LS-806	1 x RS-6090	1 x PUR-102T	1 x Color Box彩盒
LFK-750D	2 x LF-750D	2 x LS-806	1 x RS-80100	1 x PUR-102T	1 x Color Box彩盒
LFK-1000D	2 x LF-1000D	2 x LS-806	1 x RS-80100	1 x PUR-102T	1 x Color Box彩盒

Remarks: LS-805 (101-242cm)  
LS-806 (114-260cm)


RS-6090 (60 x 90cm)  
RS-80100 (80 x 100cm)

PUR-102T (Translucent, 102cm)

## 选购配件 Optional Accessories



# DL-D Series

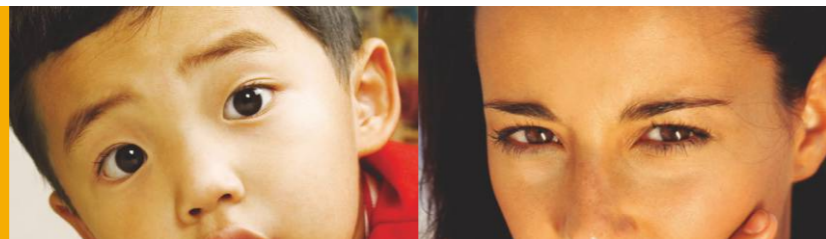

**PATENT PRODUCT!**  
专利产品!

Model 型号	DL-350D	DL-500D
Power Output 功率	350Ws	500Ws
Guide No. 闪光指数	55	65
Power Control 调光	1/32 to 1 Full (1.0-6.0), Stepless	
Modeling Lamp 造型灯	60W	
Recharging Time 回电时间	0.5-1.7sec.	
Illumination Angle 照明角度	55 Degrees	
AC Power Supply 电源	AC 220-240V 50Hz / AC 110-120V 60Hz	
Weight 重量	2 kg	2.2 kg



光同步感应器 Photo Sensor



数码显示器 LED Display

功率旋钮 Power Control

休眠指示灯 Sleep Mode Indicator

保险丝 Fuse

电源插座 Power Socket

光同步开关 Photo Sensor ON/OFF Switch

造型灯开关 Modeling Lamp Mode Button

造型灯调节按钮 Modeling Lamp ON/OFF Button

试闪测试按钮 Test Button

鸣蜂声控制开关 Beeper ON/OFF Switch

电源开关 Main Power ON/OFF Switch

同步线插座孔 Sync Socket


# Flash Kit 影室灯套装



## DL-D

DL-D也许能充份满足您对闪光灯系统的需要。它的电子显示屏清晰时尚，而无档调光为摄影时带来更大的灵活性，是高素质高科技影楼设备的象征。

DL-D Series studio flash will possibly meet all your illumination needs with its capabilities. Its symbolic digital display brings along clarity and a sense of modernity. Its stepless power control gives photographers a large degree of flexibility on illumination outputs. This quality flash is a must for your high-tech studio.

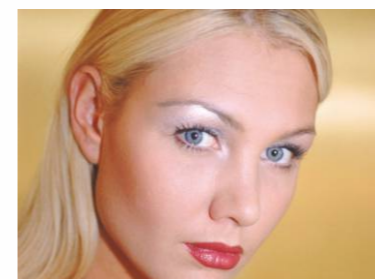

DL-D KIT				
DLK-2350D	2 x DL-350D	2 x LS-805A	2 x RS-6090	1 x Color Box彩盒
DLK-2500D	2 x DL-500D	2 x LS-805A	2 x RS-6090	1 x Color Box彩盒
DLK-3350D	3 x DL-350D	3 x LS-805A	3 x RS-6090	1 x Color Box彩盒
DLK-3500D	3 x DL-500D	3 x LS-805A	3 x RS-6090	1 x Color Box彩盒

Remarks: LS-805A (95-210cm) RS-6090 (60 x 90cm)

## 选购配件 Optional Accessories



# MT-GU

Series

Model	MT-110GU	MT-150GU
Power Output输出功率	110Ws	150Ws
Guide No.闪光指数	30	34
Power Control调光	1/16 to Full全功率, Stepless无级调光	
Modeling Lamp造型灯	50W	
Flash Duration闪光时间	1/600sec.	
Recharge Time回电时间	1-2sec.	
Illumination Angle照射角度	55°	
AC Power Supply电源	AC 220-240V 50Hz / AC 110-120V 60Hz	



## MTGK-3150U套装

- 3 x MT-150GU flash (150Ws)
- 2 x RS-5070ST Softbox (50 x 70 cm)
- 1 x BS-2016I Background System
- 1 x BCP-01 Background cloth white (1.5 x 2.8 m)
- 1 x BCP-02 Background cloth black (1.5 x 2.8 m)
- 3 x I-2501/B Light stand (max. 2.45 m)
- 1 x MTA-CS Snoot
- 1 x RF-DD4 Trigger set
- 1 x MTA-CF Color filter set



## Fluorescent Light System 节能灯系统

PATENT PRODUCT!  
专利产品!



- LSPD-4**
- Power: 4 x 28W
  - Max: 4 x 55W
  - Softbox: 50 x 70cm

- LSPD-7**
- Power: 7 x 28W
  - Softbox: Ø70cm

## LSPD Series

LSPD-4K1	1 x LSPD -4	1 x Softbox柔光箱 (50 x 70cm)	1 x I-2001
LSPD-4K3	3 x LSPD-4	3 x Softbox柔光箱 (50 x 70cm)	3 x I-2001
LSPD-7K1	1 x LSPD-7	1 x Softbox 柔光箱(Ø70cm)	1 x I-2001
LSPD-7K2	2 x LSPD-7	2 x Softbox 柔光箱(Ø70cm)	2 x I-2001

Remarks:I-2001(86-205 cm)

# Flash Tube & Light Bulb

## 闪光管及灯泡

### 闪光管 Flash Tube



### 灯泡 Light Bulb



UTC-062840-120L-MTGU	MT-110GU
UTC-082840-160L-MTGU	MT-150GU
RTC-0636-120L(UV)-MTG	MT-120G
RTC-0838-220L(UV)-MTG	MT-160G
RTC-0838-250L(UV)-MTD	MT-150D, MT-200D, MT-250D
RTC-0855-250L(UV)-LF	LF-250A, LF-250D
RTC-0955-350L(UV)-LF	LF-300A
RTC-0955-350L(UV)-DL	DL-350D
RTC-1055-450L(UV)-LF	LF-400A
RTC-1255-600L(UV)-LF	LF-500A, LF-500D, LF-500L
RTC-1255-600L(UV)-DL	DL-500D
RTC-1355-1000L(UV)-LF	LF-750A, LF-750D, LF-1000A, LF-1000D, LF-1000L

## 节能灯 Fluorescent lighting

LSP-D系列可配用4个或7个灯泡拼凑出明亮的光源，LSP-D可在拍摄时保持低温而安静拍摄环境。这也是一个节能的设备，当配以7个节能灯便可以提供卓越的光源和性能。与其他钨丝灯和闪光灯相比，LSP-D较易操控，是拍摄最佳的选择。

LSP-D series compact light head offers the choice of four and seven spiral fluorescent lamps to illuminate the powerful cool light in quiet; it maintains a relatively low temperature and is quiet during shootings, This is also an energy saver equipment that creates incredibly bright light with outstanding performance when equipped with seven spiral fluorescent lamps, Photographers will definitely find that it is easy to control and ifs an excellent choice compared to any tungsten light and studio flash.



# Umbrella Reflector反光伞




PUK-84WB/102WB



PUK-84GS/102GS



PUR-84SB/102SB/122SB




PUR-84MW/102MW

PUK (Reversible) Series			PUR Series		
Model	Dimension	Color	Model	Dimension	Color
PUK-84WB	84cm	White & Black Cover	PUR-84T	84cm	Translucent
PUK-102WB	102cm	White & Black Cover	PUR-102T	102cm	Translucent
PUK-102SW	102cm	Silver & White	PUR-122T	122cm	Translucent


PUK Series Setup Procedure  
安装步骤



# Foldable Octagon Softboxes & Beauty Dish 易撑八角柔光箱&雷达罩

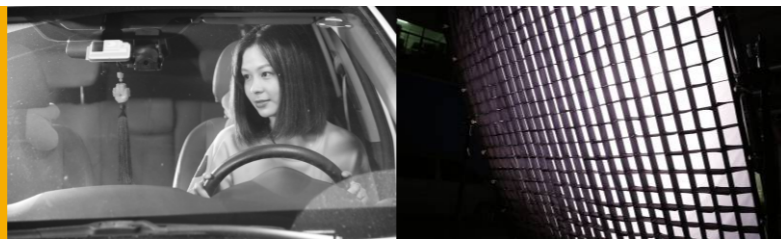

NEW

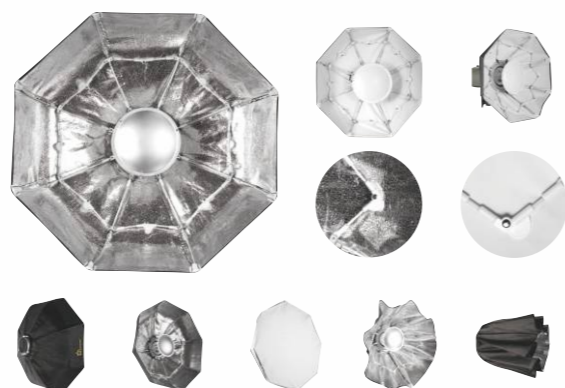

易撑八角柔光箱 Foldable Octagon Softboxes

易撑雷达罩 Foldable Beauty Dish

## 易撑八角柔光箱 Foldable Octagon Softboxes




QSOB-11+HC  
(HC version 配蜂巢版本)



1: 取出柔光箱  
Take out the softbox



2: 轻推支撑杆  
Push supporting rod



4: 完成 (carry out)



3: 打开(turn on)

易撑八角柔光箱(可换接口) Foldable Octagon Softboxes (EX-MOUNT)	
QSOB-8(φ32"/φ80cm)	QSOB-8+HC(φ32"/φ80cm)
QSOB-11(φ44"/φ110cm)	QSOB-11+HC(φ44"/φ110cm)

## 易撑雷达罩 Foldable Beauty Dish

这是可折叠的雷达罩! 从今以后, 你能把你的雷达罩放于背包中。

It is true, a foldable beauty dish!  
Now you can put your beauty dish even in your bag pack!



\*(HC version 配蜂巢版本)



易撑雷达罩(可换接口)/Foldable Beauty Dish (EX-MOUNT)	
QSSR-70X/S(φ28"/φ70cm)	QSSR-70X/S+HC(φ28"/φ70cm)
QSSR-70X/W(φ28"/φ70cm)	QSSR-70X/W+HC(φ28"/φ70cm)
QSSR-85X/S(φ34"/φ85cm)	QSSR-85X/S+HC(φ34"/φ85cm)
QSSR-85X/W(φ34"/φ85cm)	QSSR-85X/W+HC(φ34"/φ85cm)
QSSR-100X/S(φ40"/100cm)	QSSR-100X/S+HC(φ40"/100cm)
QSSR-100X/W(φ40"/100cm)	QSSR-100X/W+HC(φ40"/100cm)

# Foldable Softboxes



易撑柔光箱

## 易撑方形柔光箱 Foldable Square Softboxes

QSSX系列能让你把时间花在重要的工作上! 方便, 快速的组装, 令你在任何环境中能快速进行工作。


Can you imagine setting up your softbox in 3 minutes, No matter outdoor or in studio, Foldable Softbox QSSX-series save you valuable time on your job.

**NEW**

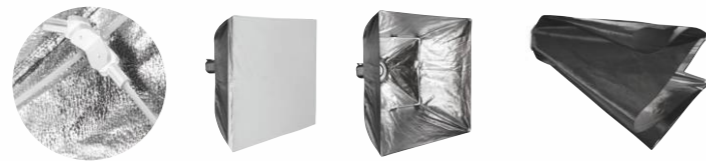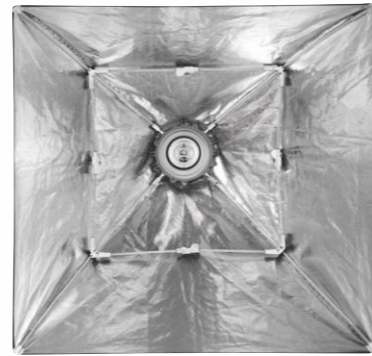

Foldable Rectangular Softboxes(Ring Exchangable 可换接环)	Foldable Square Softboxes(Ring Exchangable 可换接环)
QSSX-7575(30 x 30"/75x75cm)	QSSX-7575+HC(30 x 30"/75x75cm)
QSSX-9090(36 x 36"/90x90cm)	QSSX-9090+HC(36 x 36"/90x90cm)

## 易撑长方形柔光箱 Foldable Rectangular Softboxes

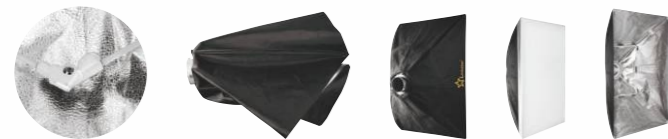


- 1: 取出柔光箱  
Take out the softbox
- 2: 轻推支撑杆  
Push supporting rod
- 3: 打开(turn on)
- 4: 完成 (carry out)

\*(HC version 配蜂巢版本)

易撑长方形柔光箱(可换接口) Foldable Rectangular Softboxes (EX-MOUNT)	
QSSX-6090(24 x 36"/60 x 90cm)	QSSX-6090+HC(24 x 36"/60 x 90cm)
QSSX-30150(12 x 59"/30 x 150cm)	QSSX-30150+HC(12 x 59"/30 x 150cm)
QSSX-80120(32 x 48"/80 x 120cm)	QSSX-80120+HC(32 x 48"/80 x 120cm)

# Kit Bag

套装包

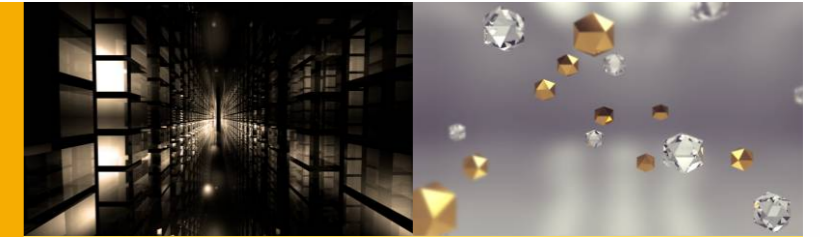

G-001 72 x 32 x 25cm



G-002 45 x 28 x 25cm



G-005 105 x 21 x 16cm  
For Light Stand: LS-M, LS-MA, LS-Z Series, L-30L, LS-805 & LS-806



G-006 80 x 21 x 16cm  
For Light Stand: L-23S, L-26M, LS-802 & LS-803



G-007 72 x 24 x 34cm



KC-101 78 x 27 x 24cm

# Reflector


反光板



FR-80B



FR-110B

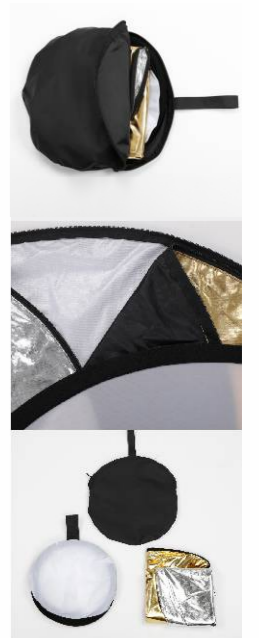


Model 型号 (5-IN-1)	Dimension 尺寸	Color 颜色
FR-80B	Φ80cm	Silver银 White白 Black黑
FR-110B	Φ110cm	Gold金 Translucent透明



# Background Support System

## 背景架

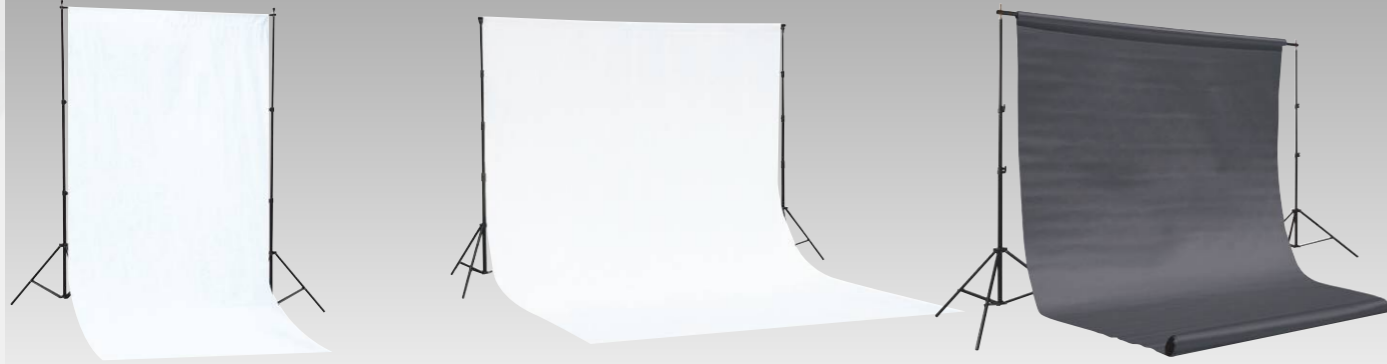

### BSK-2016

2 x Light Stand (Max Height: 200cm)  
1 x Horizontal Bar (Max Length: 160cm)  
1 x Background Cloth (150 x 280cm)  
1 x Carrying Bag  
18 Color To Choose  
Note: BS-2016 denoted stand only.

### BS-3031

2 x L-30L  
(103-300cm)  
1 x CB-3150  
(Horizontal Bar: Max 315cm)

### BS-2531

2 x LS-25M  
(Light Stand: 104-250cm)  
1 x CB-3150  
(Horizontal Bar: Max 315cm)  
Note: Stand only. For cloth color & pattern.

# Light Stand

## 三脚灯架



L Series



LS-Y Series

Model型号	L Series (Air Cushion)			LS-Y Series (Air Cushion)
	L-24S	L-26M	L-30L	LS-39Y
Operation Height伸高	78-240cm	92-266cm	103-300cm	390cm
Collapsed Height缩高	70cm	78cm	87cm	113cm
Spread伸延	94cm	96cm	106cm	130cm
Net Weight净重	2.0kg	1.4kg	1.6kg	2.3kg
Loading Weight负重	6kg	8kg	8kg	/

# SLK-8

PATENT PRODUCT!  
专利产品!



万能接口 SLA-UM

单靠机顶闪光灯来为摄影补光效果未必理想，经常会导致局部曝光过度等问题。SLK-8 是一套齐全的机顶闪光灯套装，利用各种配件来制造理想效果：柔光球、柔光箱等做出平均、柔和光线，反光罩加强亮度，束光筒、四叶片集中光线，强调阴影效果等等。配合套装里的通用接口 SLA-UM，几乎所有闪光灯都能用这方便的配件套装。

Illumination effects achieved solely with speedlights may not be ideal as problems like partial overexposure often arise. SLK-8 is right here to rid you of those problems. The kit includes a complete series of accessories: a diffuser ball and a softbox to create evenly distributed soft light, a reflector to enhance illumination, a snoot and a barn door for highlighting shadows and so on. The kit can be used with nearly all speedlights on the market with the included universal mount, SLA-UM.

# SLK-8

## 相机闪光灯配件

### Speedlite Accessories



SLA-HC1010-3  
蜂巢



SLA-SR173S  
雷达罩



SLA-CF  
色罩



SLA-DB150  
柔光球



SLA-BD4  
四叶片



SLA-SB2030S  
柔光箱



SLA-CS  
束光筒

# Accessories

配件



**BH-4F8F**  
female: 1/4"  
female: 3/8"



**BH-4F8M**  
male: 3/8"  
female: 1/4"



**BH-4M8F**  
male: 1/4"  
female: 3/8"



**BH-4M8M**  
male: 1/4"  
male: 3/8"



**BH-B4M8M**  
male: 1/4"  
male: 3/8"



**BH-4M4FUR**  
female: 1/4"  
male: 3/8"



**BH-S4F8M**  
female: 1/4"  
male: 3/8"



**SA-C**



**SA-C1**



**SA-PC**



**SA-TB1**



**SA-TB2**



**SA-TB3**



**SA-TB4HS**



**CL-35FL**



**CL-35A**



**CL-35AL**



**MBH-700**



**MBH-700S**



**HS-20M**



**CLD-14+TMB-12BHS**



**CLD-22**



**CLD-14**



**CL-40EC**




**CBH-9**



美国加丽牌进口无缝背景纸  
USA Imported - Colortone High Quality Seamless Background Paper

Size尺寸: 2.75 x 9m



**01 Super White**  
超白



**09 Stone Gray**  
石头灰



**16 Chestnut**  
可可色



**18 Evergreen**  
深绿



**24 Orange**  
鲜橙



**25 Beige**  
浅褐色



**27 Thunder Gray**  
暗灰



**34 Olive Green**  
橄榄绿



**37 Tulip**  
浅粉红



**38 Canary**  
白杨树黄



**46 Tech Green**  
威士忌绿



**47 Baby Blue**  
高山蓝



**55 Autumn**  
秋叶褐



**58 Studio Blue**  
宝蓝



**62 Purple**  
鲜紫



**64 Blue Gean**  
牛仔蓝



**67 Ruby**  
豆沙色



**73 Greentone**  
苹果绿




**74 Smoke Gray**  
中灰



**75 True Blue**  
浅蓝



**76 Mocha**  
摩卡色



**79 Almond**  
杏色



**80 Cocoa**  
豆蔻色



**83 Turquoise**  
绿松石蓝