

锐鹰影视器材

# 百变卷布灯

系列

## ROLL-FLEX LED PANEL

- S E R I E S



### 深圳市元科摄影器材有限公司

SHENZHEN FOTOTECH  
PHOTOGRAPHIC EQUIPMENT CO.,LTD.

深圳市福田区福虹路世界贸易广场B座18D  
Unit D, 18/F, Block B, Fuhong Road,  
World Trade Plaza, Futian District, Shenzhen, China

Tel: +86 755 8250 0451  
QQ: 2850141641 2850141642  
Fax: +86 755 8288 6977  
Http://www.fototech.com.cn

We reserve the rights to make any changes due to technical developments.  
© Copyright ,Falcon Eyes Ltd.

锐鹰官网(中国) :  
<http://www.falconeyes.com.cn>

锐鹰官网(中国香港) :  
<http://www.falconeyes.hk>

锐鹰天猫官方旗舰店 :  
<https://falconeyes.tmall.com>

京东锐鹰摄影摄像专营店 :  
<http://mall.jd.com/index-193906.html>



锐鹰天猫官方旗舰店



京东锐鹰摄影摄像专营店

锐鹰影视器材



# LIGHTWEIGHT PORTABLE 轻便外拍灯

2019

百变卷布灯(系列)

ROLL-FLEX LED PANEL-SERIES

### 锐鹰有限公司 (FALCON EYES LTD.)

Address 香港九龙红磡鹤园街2G号恒丰工业大厦一期11字楼E1室  
Unit E1, 11/F,Phase 1,Hang Fung Building,2G Hok Yuen Street, Hung Hom,Kowloon,Hong Kong

Tel 852-2363-2825 Email info@falconeyes.com.hk  
Fax 852-2363-3856 Website http://www.falconeyes.hk

We reserve the rights to make any changes due to technical developments. © Copyright ,Falcon Eyes Ltd.



锐鹰官方网站 (中国)



锐鹰官方网站 (香港)  
Falcon Eyes Ltd Official Site (HK)



锐鹰官方微信



## ROLL-FLEX LED PANEL

# 布灯系列

The new ROLL-FLEX LED light is developed with the latest SMD LED technology to perform roll-able and flexible movement through slim panel housing. It is handy lightweight and easy to carry around which is great to use as outdoor light source. The ROLL-FLEX comes in different sizes, power output, and tungsten to daylight setting, as well as different control systems, to aim for different types of film production.

The RX-TD version comes with Falcon Eyes Share Your Move (互控) feature, this allows you to control the dimmer and color setting between multiple lights through 2.4 GHz frequency. RC-6 remote controller can be used with the mutual control system.

RX-TDX version is implanted with DMX feature, with the

DMX input and output ports, it can be connected to the DMX console to perform wide range of lighting effect. RX-TDX is also compatible with the RC-3T remote controller for 2.4GHz dimmer and color adjustment.

Every ROLL-FLEX will come with a X-bracket, so you can mount the ROLL-FLEX on a light stand in order to use as a LED panel. The Light modifiers as softbox and velcro can be purchased optional. Extension cables and a choice of connection accessories are available to order upon your preferences.

Most of the ROLL-FLEX models are compatible with both AC and DC power to suit for either on location and studio production.

锐鹰新研发的ROLL-FLEX卷布LED灯采用了全新的薄片LED科技, 令超薄的灯体可以灵活地卷曲来调整灯的照射角度。LED卷布灯非常轻巧, 方便携带, 极为适合作为户外光源。ROLL-FLEX具有不同的尺寸, 功率输出, 暖光至日光设置, 以及不同的控制功能系统, 非常适用于不同类型的影视制作上使用。

RX-TD版本配备了锐鹰 Share Your Move (互控)功能, 可让您通过2.4GHz频率控制多个灯光的亮度和色温设置。RC-6遥控器可配合此互控系统使用。

RX-TDX版本植入了DMX功能, DMX输入和输出端可以连接到DMX控制台, 以执行不同的光源效果。RX-TDX可配合RC-3T遥控器使用, 以2.4GHz频率遥控布灯的亮度和色温。

每款布灯都标配有X支架, 令其可配置于灯架上使用如变成了一个轻巧的LED平板灯。柔光箱和蜂巢这些柔光配件可以额外选购。此外, 用户可根据自己的喜好订购延长线和各种连接配件。大部份ROLL-FLEX型号都配备了交流和直流能源驱动, 使户外及影室制作更加方便。



**RX-12T**  
34W  
460x320mm

**RX-12TD**  
50W  
460x320mm

**RX-18T**  
62W  
610x460mm

**RX-18TD**  
100W  
610x460mm

**RX-24TDX**  
150W  
625x625mm

**RX-29TDX**  
100W  
1210x240mm

**RX-36TDX**  
250W  
1210x460mm

**RX-48TDX**  
300W  
1215x615mm

**RX-120TDX**  
600W  
1140x1150mm

# 轻便外拍 LIGHTWEIGHT PORTABLE



## RX-12T Roll-Flex LED Light




460mm

320mm

- COLOFLEX 高显色
- ROLL-FLEX 可弯曲
- BORN IN THIN 超薄机身

34W 3200K/5600K

Lux/照度	0.5m	1m	2m
	3680	1230	351

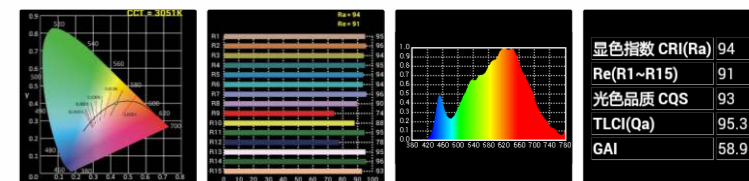

### 单灯标配: SINGLE LIGHT KIT



### 套装组合: MULTI-LIGHT KIT





### 选购配件: OPTIONAL ACCESSORIES



# RX-12TD

## Roll-Flex LED Light

- COLOUR 高显色
- TOUCH READY 触屏
- SHARE YOUR MOVE 遥控
- ROLL-FLEX 可弯曲
- SCROLL THIN 超薄机身

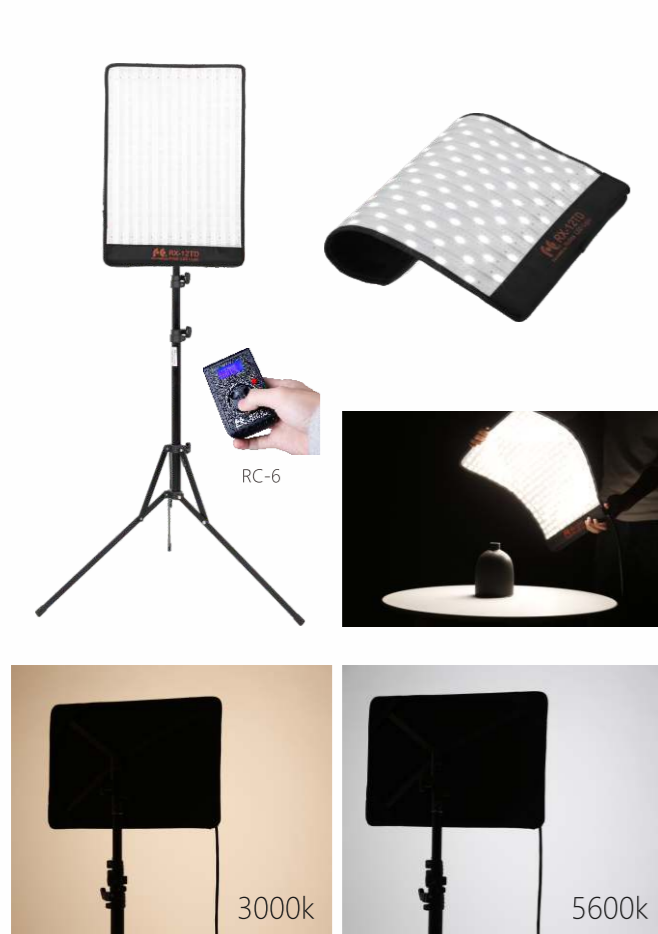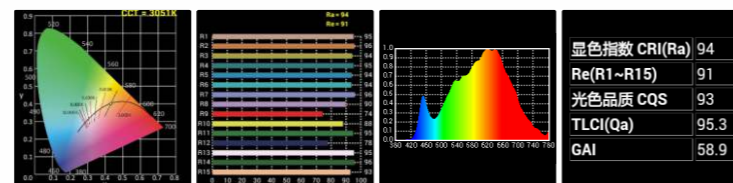

**RX-12TD 50W 3000K-5600K 460mm**

Lux/照度	0.5m	1m	2m
	6400	1989	515



### 单灯标配: SINGLE LIGHT KIT

- |  |   |                                |
|--|---|--------------------------------|
| RX-12TD x1   | 线路控制盒+调光器<br>Control box                                | 电源适配器<br>AC adapter            |
| 多用途安装魔术带(黑色) x4<br>Installation velcro tape (Black) x4 | X型支架架配L型转接头<br>X-bracket with tilting<br>bracket CLD-14 | 适配器电源线<br>Cable for AC adapter |
| 多灯拼接魔术带(黑色) x1<br>Extention Velcro tape (Black) x1     | 多用途安装魔术带(白色) x2<br>Installation velcro tape (White) x2  |                                |



### 套装组合: MULTI-LIGHT KIT



### 选购配件: OPTIONAL ACCESSORIES




Model No. 型号	RX-12T	RX-12TD
LEDs & Power LED 灯泡数及功率	280pcs	280pcs
Out put Wattage 输出功率	34W	50W
Color Temperature 色温	3200K/5600K	3000K-5600K
Operating Voltage 工作电压	DC-15V 5A	DC-15V 5A
Dimming 调光	0-100% Step-less dimming 0-100% 无极调光	0-100% Step-less dimming ON/OFF 开关 Touch Screen 触屏
Compatibility 兼容性	AC Adaptor 适配器 Sony V Mount Battery 锂电池 (DC)	AC Adaptor 适配器 Sony V Mount Battery 锂电池 (DC)
Control Function 调控方式	Turning Knob 旋钮	Touch Screen 触屏
CRI 显色度	95	95
Lux 照度	0.5M:3680 1M:1230 2M: 351	0.5M:6400 1M:1989 2M: 515
Beam Angle 照射角度	10-360°	10-360°
Footcandles 英尺烛光	0.5M:342 1M:114 2M: 33	0.5M:595 1M:185 2M: 48
Dimensions 机身尺寸	460x320mm	460x320mm
Weight 重量	Light 布灯:0.3KG Control Box电源:0.49KG AC Adaptor 5A适配器:0.39KG	Light 布灯:0.3KG Control Box电源:0.49KG AC Adaptor 5A适配器:0.39KG
Mounting Method 安装配套	X-Frame+CLD-14 X支架+万向接头	X-Frame+CLD-14 X支架+万向接头
In the box 配件	AC Adaptor 适配器 DC-15V 5A X-Frame X支架+ CLD-14 Control Box 控制盒 Velcro Tape 魔术毛勾贴	AC Adaptor 适配器 DC-15V 5A X-Frame X支架+ CLD-14 Control Box 控制盒 Velcro Tape 魔术毛勾贴
Optional Accessories 选购配件	Spread Softbox 扩散柔光箱: RX-12OB Softbox 柔光箱: RX-12SB Light Stand 灯架: LMC-1900/B	Spread Softbox 扩散柔光箱: RX-12OB Softbox 柔光箱: RX-12SB Light Stand 灯架: LMC-1900/B RC-6



# RX-18T

## Roll-Flex LED Light

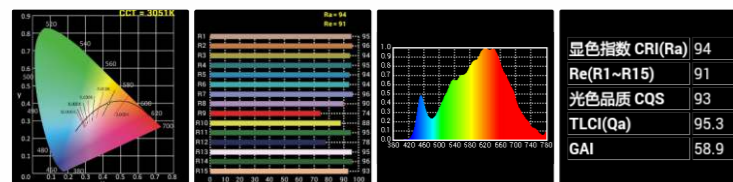

RX-18T 62W 3200K/5600K

Lux/照度	0.5m	1m	2m
	6940	2470	668



### 单灯标配: SINGLE LIGHT KIT




### 套装组合: MULTI-LIGHT KIT





# RX-18TD

## Roll-Flex LED Light

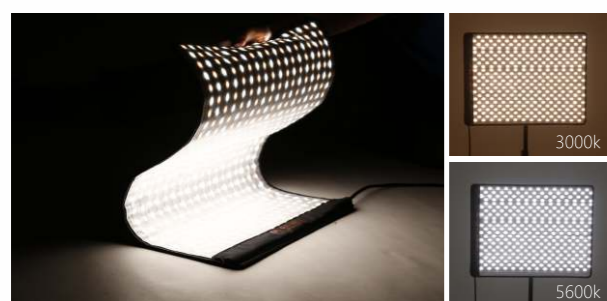

RX-18TD 100W 3000K-5600K

Lux/照度	0.5m	1m	2m
	9920	3660	933

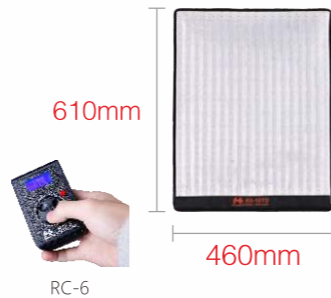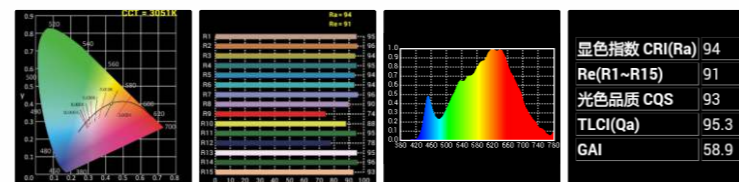

### 单灯标配: SINGLE LIGHT KIT



### 套装组合: MULTI-LIGHT KIT



### 选购配件: OPTIONAL ACCESSORIES



Model No. 型号	RX-18T	RX-18TD
LEDs & Power LED 灯泡数及功率	504pcs	504pcs
Out put Wattage 输出功率	62W	100W
Color Temperature 色温	3200K and 5600K Alternative 3200k或5600k二选一	3000K - 5600K
Operating Voltage 工作电压	DC-15V 5A	DC-15V 7A
Dimming 调光	0-100% Step-less dimming 0-100% 无极调光	0-100% Step-less dimming ON/OFF 开关 Touch Screen 触屏
Compatibility 兼容性	AC Adaptor 适配器 Sony V Mount Battery 锂电池(DC)	AC Adaptor 适配器 Sony V Mount Battery 锂电池(DC)
Control Function 调控方式	Turning Knob 旋钮	Touch Screen 触屏
CRI 显色度	95	95
Lux 照度	0.5M:6940 1M:2470 2M: 668	0.5M:9920 1M:3660 2M: 933
Beam Angle 照射角度	10-360°	10-360°
Footcandles 英尺烛光	0.5M:645 1M:230 2M:62	0.5M:922 1M:340 2M:87
Dimensions 机身尺寸	610x460mm	610x460mm
Weight 重量	Light 布灯:0.5KG Control Box电源:0.49KG AC Adaptor 5A适配器:0.39KG	Light 布灯:0.5KG Control Box电源:1.05KG AC Adaptor 7A适配器:0.47KG
Mounting Method 安装配套	X-Frame+CLD-14 X支架+万向接头	X-Frame+CLD-14 X支架+万向接头
In the box 配件	AC Adaptor 适配器 DC-15V 5A X-Frame X支架+ CLD-14 Control Box 控制盒 Velcro Tape 魔术毛勾贴	AC Adaptor 适配器 DC-15V 7A X-Frame X支架+ CLD-14 Control Box 控制盒 Velcro Tape 魔术毛勾贴
Optional Accessories 选购配件	Spread Softbox 扩散柔光箱: RX-180B Softbox 柔光箱: RX-18SB Light Stand 灯架: LMC-1900/B	Spread Softbox 扩散柔光箱: RX-180B Softbox 柔光箱: RX-18SB Light Stand 灯架: LMC-1900/B RC-6

# RX-24TDX

## Roll-Flex LED Light

RX-24TDX 150W 3000K-5600K

Lux/照度	0.5m	1m	2m
	11600	3790	1060



RC-3T



### 单灯标配: SINGLE LIGHT KIT



RX-24TDX  
AC Adaptor 适配器 DC-15V  
X-Frame X支架+ CLD-14  
Control Box 控制盒  
Velcro Tape 魔术毛勾贴  
Carry Bag 布袋

### 套装组合: MULTI-LIGHT KIT



# RX-29TDX

## Roll-Flex LED Light

RX-29TDX 100W 3000K-5600K

Lux/照度	0.5m	1m	2m
	7980	2960	933



RC-3T



5600K

4000K

3000K

### 单灯标配: SINGLE LIGHT KIT

RX-29TDX  
Carry Bag 布袋  
Control Box 控制盒  
AC Adaptor 适配器 DC-15V  
X-Frame X支架+ CLD-14  
Velcro Tape 魔术毛勾贴



### 套装组合: MULTI-LIGHT KIT




### 选购配件: OPTIONAL ACCESSORIES



Model No. 型号	RX-24TDX	RX-29TDX
LEDs & Power LED 灯泡数及功率	756pcs x 0.5W	504pcs x 0.5W
Out put Wattage 输出功率	150W	100W
Color Temperature 色温	3000K - 5600K	3000K - 5600K
Operating Voltage 工作电压	DC-15V 10A	DC-15V 7A
Dimming 调光	0-100% Step-less dimming ON/OFF 开关 Touch Screen 触屏	0-100% Step-less dimming ON/OFF 开关 Touch Screen 触屏
Compatibility 兼容性	AC Adaptor 适配器 Sony V Mount Battery (DC) V卡口电池座	AC Adaptor 适配器 Sony V Mount Battery (DC) V卡口电池座
Control Function 调控方式	Touch Screen, Turning Knob, DMX, 2.4G remote (RC-3T) 触屏, 旋钮, DMX, 2.4G遥控器 (RC-3T)	Touch Screen, Turning Knob, DMX, 2.4G remote (RC-3T) 触屏, 旋钮, DMX, 2.4G遥控器 (RC-3T)
CRI 显色度	95	95
Lux 照度	0.5M:11600 1M:3790 2M: 1060	0.5M:7980 1M:2960 2M: 933
Beam Angle 照射角度	10-360°	10-360°
Footcandles 英尺烛光	0.5M:1078 1M:352 2M:99	0.5M:742 1M:275 2M:87
Dimensions 机身尺寸	625x625mm	1210x240mm
Weight 重量	Light 布灯:0.63KG Control Box电源:1.05KG AC Adaptor 10A适配器:0.91KG	Light 布灯:0.52KG Control Box电源:1.05KG AC Adaptor 7A适配器:0.47KG
Mounting Method 安装配套	X-Frame+CLD-14 X支架+万向接头	X-Frame+CLD-14 X支架+万向接头
In the box 配件	Carry Bag 布袋 AC Adaptor 适配器 DC-15V X-Frame X支架+ CLD-14 Control Box 控制盒 Velcro Tape 魔术毛勾贴	Carry Bag 布袋 AC Adaptor 适配器 DC-15V X-Frame X支架+ CLD-14 Control Box 控制盒
Optional Accessories 选购配件	Softbox蜂巢柔光箱RX-24SBHC Light Stand 灯架I-2601/B Li-ion Battery 锂电池BP-160 Battery Charger 充电器FC-B1 RC-3T遥控器 Spread Softbox 扩散柔光箱RX-24OB	Softbox 蜂巢柔光箱 RX-29SBHC Light Stand 灯架I-2601/B Li-ion Battery 锂电池BP-160 BatteryCharger 充电器FC-B1 RC-3T遥控器

# RX-36TDX

## Roll-Flex LED Light

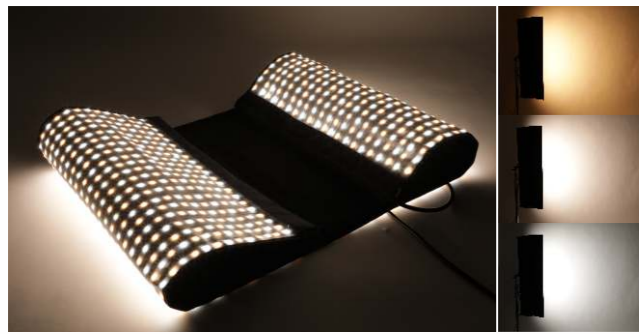

- COLORITE 高显色
- TOUCH READY 触屏
- DMX-READY DMX操控
- ROLL-FLEX 可弯曲
- BORN IN THIN 超薄机身



### 单灯标配: SINGLE LIGHT KIT



RX-36TDX  
Power cord 电源线  
Control Box 控制盒  
X-Frame X支架+ CLD-14  
BGE-10L (100x22x14CM)

# RX-48TDX

## Roll-Flex LED Light

RX-48TDX 300W 3000K-5600K

Lux/照度	0.5m	1m	2m
	19200	7540	2460

- COLORITE 高显色
- TOUCH READY 触屏
- DMX-READY DMX操控
- ROLL-FLEX 可弯曲
- BORN IN THIN 超薄机身



### 单灯标配: SINGLE LIGHT KIT



RX-48TDX



Control Box 控制盒



X-Frame X支架+ CLD-16



CC-20

### 套装组合: MULTI-LIGHT KIT



### RX-48TDX-K8(八灯套装)



### 选购配件: OPTIONAL ACCESSORIES



YK-005



RC-3T



Li-ion Battery  
锂电池BP-260HL



Light Stand  
灯架I-2601/B



Softbox蜂巢柔光箱  
RX-36SBHC



Softbox蜂巢柔光箱  
RX-48SBHC


Model No. 型号	RX-36TDX	RX-48TDX
LEDs & Power LED 灯泡数及功率	1176pcs x 0.5W	1512pcs x 0.5W
Out put Wattage 输出功率	250W	300W
Color Temperature 色温	3000K - 5600K	3000K - 5600K
Operating Voltage 工作电压	AC-110V-240V	AC-110V-240V
Dimming 调光	0-100% Step-less dimming ON/OFF 开关 Touch Screen 触屏	0-100% Step-less dimming ON/OFF 开关 Touch Screen 触屏
Compatibility 兼容性	AC POWER 交流电 Sony V Mount Battery (DC) V卡口电池座	AC POWER 交流电 Sony V Mount Battery (DC) V卡口电池座
Control Function 调控方式	Touch Screen, Turning Knob, DMX, 2.4G remote (RC-3T) 触屏, 旋钮, DMX, 2.4G遥控器 (RC-3T)	Touch Screen Turning knob DMX 2.4G remote/RC-3T 触屏 旋钮 DMX 2.4G遥控器RC-3T
CRI 显色度	95	95
Lux 照度	0.5M: 15800 1M: 6040 2M: 1910	0.5M:19200 1M:7540 2M: 2460
Beam Angle 照射角度	10-360°	10-360°
Footcandles 英尺烛光	0.5M: 1468 1M: 561 2M: 178	0.5M:1784 1M:701 2M:229
Dimensions 机身尺寸	1210x460mm	布灯: 1215x615mm 电源: 320x155x140mm
Weight 重量	Light 布灯:1.02KG Control Box电源:3.55KG	Light 布灯:1.36KG Control Box电源:3.55KG
Mounting Method 安装配套	X-Frame+CLD-14 X支架+万向接头	X-Frame+CLD-16 X支架+万向接头
In the box 配件	Power cord 电源线 Control Box 控制盒 X-Frame X支架+ CLD-14 BGE-10L (100x22x14CM)	Power cord 电源线 Control Box 控制盒 X-Frame X支架+ CLD-16 CC-20
Optional Accessories 选购配件	Softbox蜂巢柔光箱 RX-36SBHC Light Stand 灯架I-2601/B Li-ion Battery锂电池BP-260VL Battery Charger 充电器FC-B2 RC-3T遥控器	Softbox蜂巢柔光箱 RX-48SBHC Light Stand 灯架I-2601/B Li-ion Battery锂电池BP-260HL Battery Charger 充电器FC-B2 RC-3T遥控器

# RX-120TDX

## Roll-Flex LED Light

RX-120TDX 600W 3000K-5600K

Lux/照度	0.5m	1m	2m	3m
3000K	29300	13500	4690	2390
5600K	32200	15300	5350	2730



The new Falcon Eyes RX-120TDX outputs a stunning 600W bi-color (LUX value of 32200 at 0.5m) with just a single control box! As all other ROLL-FLEX LED lights, RX-120TDX is developed with the latest LED technology to perform roll-able and flexible movement with a 10mm thickness of slim panel.

All RX-TDX series is implanted with DMX and 2.4G remote control feature (compatible with RC-3T remote controller).

The external control box is connected to the flex light, with turning knobs for controlling, desirable color and power setting can be adjusted easily. Lastly, RX-120TDX is designed with full voltage 110V-240V which can be used worldwide for different types of film applications.

锐鹰新研发的RX-120TDX只需配置一个控制盒即可输出高功率600W的双色光源! (照度LUX值为32200于0.5米距离测试)。RX-120TDX与其他ROLL-FLEX卷布LED灯同样采用了最新的薄片LED科技, 令只有10毫米厚的灯芯可以灵活地卷曲来调整灯的照射角度。

所有RX-TDX版本植入了DMX系统及2.4G遥控接收功能(配合RC-3T遥控器使用)。

卷布灯的外置控制盒配备了调光旋钮, 令你可以更准确地调节色温及亮度输出, 制造出最理想的光源效果。RX-120TDX采用全电压110V-240V设计使其可于全球使用, 非常适合不同类型的影视应用。



Control Box  
控制盒

RC-3T  
可使用遥控器



Side View 侧面

Back 背面

RX-120HC (蜂巢)

RX-120SB (柔光箱)

### 单灯标配: SINGLE LIGHT KIT



### 套装组合: MULTI-LIGHT KIT

#### RX-120-K4

RX-120TDX x4pcs 布条套 SP-RRX88 x1set



SP-RRX88

RX-120TDX



#### RX-120-K12

### 选购配件: OPTIONAL ACCESSORIES



RC-3T

YK-005

CC-06

#### Model No. 型号 RX-120TDX

LEDs & Power LED 灯泡数及功率	1848pcs x 0.5W<Daylight 白> 1848pcs x 0.5W<Tungsten 黄>	Footcandles 英尺烛光	3000K / 0.5M 2723 / 1M 1255 / 2M 436 / 3M 222 5600K / 0.5M 2993 / 1M 1422 / 2M 497 / 3M 254
Out put Wattage 输出功率	600W	Dimensions 机身尺寸	Control Box 电源: 300x285x104mm Light + Frame布灯+架子(FK-1212): 1200x1200mm Light布灯: 1140x1150mm
Color Temperature 色温	3000K - 5600K	Weight 重量	Light + Frame布灯+架子(FK-1212):3.27KG 电源:6.22KG
Operating Voltage 工作电压	AC-110V-240V	Noise Level (dB) 噪音的分贝强度	/
Dimming 调光	0-100% Step-less dimming Turning Knob 旋钮/触屏 ON/OFF 开关	In the box 配件	Control Box 控制盒 RX-120HC (蜂巢) RX-120SB (柔光箱) CC-06 (套装袋) SP-XC08(8m)
Compatibility 兼容性	AC POWER 交流电	Optional Accessories 选购配件	RC-3T YK-005 CC-06
Control Function 调控方式	ON/OFF、Turning Knob、remote、RC-3T、DMX-512 开关、旋钮、触屏、2.4G无线遥控、DMX		
CRI 显色度	95		
Lux 照度	3000K / 0.5M 29300 / 1M 13500 / 2M 4690 / 3M 2390 5600K / 0.5M 32200 / 1M 15300 / 2M 5350 / 3M 2730		
Beam Angle 照射角度	10°-360°		





# ROLL-FLEX RGB SERIES

# 七彩卷布灯



## Roll-Flex RGB Series


Falcon Eyes new RGBW LED tech has been applied to the best selling Roll-flex series. With the flexibility of the Roll-able LED mat and RGB LED, more lighting effects can be made and sure can help to transfer your imagination to actual practice.

The Roll-Flex RGB is also supported with DMX control which allows even more possibility on application. With DMX control Roll-Flex RGB light can be programmed to create different motion background like police car light or any color movement effect. This will be a great solution on portable effect lights and small video production.

## 七彩卷布灯

锐鹰把最新的RGB LED灯技术套用到最畅销的卷布灯上，卷布灯的功能配合RGB LED灯可创造出更多样化的灯光效果，可以把想像的效果转化为实践。

七彩卷布灯同时亦支援DMX控制系统，而且可令七彩卷布灯的应用富更多可能性。配合DMX控制的七彩卷布灯可以编入程式，作出不同的动感光效，如警车灯效果，或其他任何动态光效。这将会成为在影视及舞台上的一一个优质解决方案。



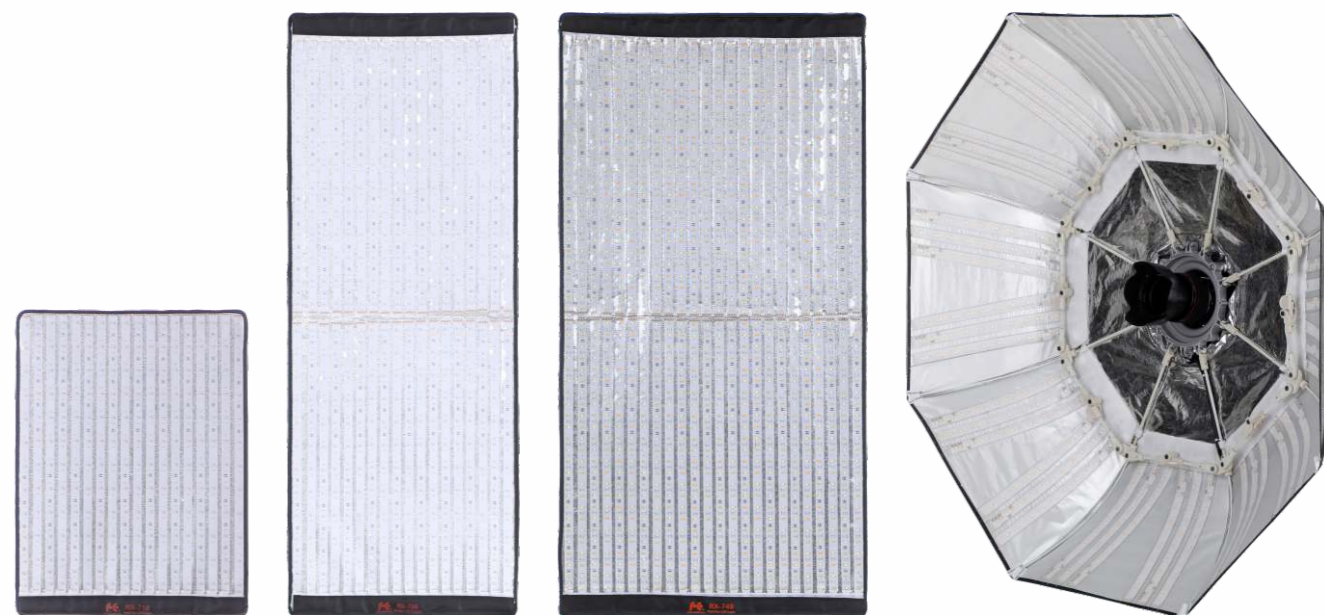


**RX-718**  
100W  
610x460mm

**RX-736**  
200W  
1200x465mm

**RX-748**  
300W  
1200x600mm

**RX-782**  
220W  
直径 Dia. 1000mm

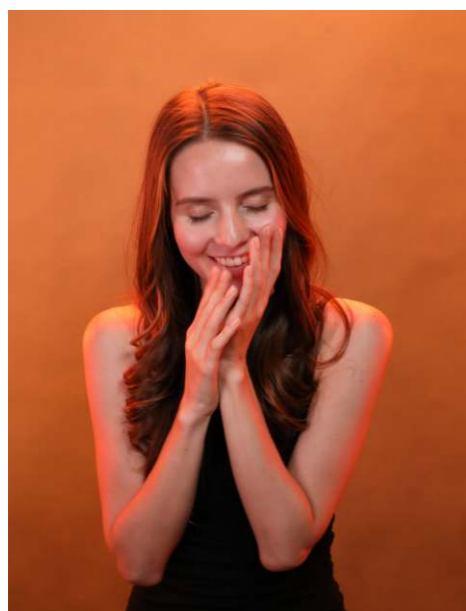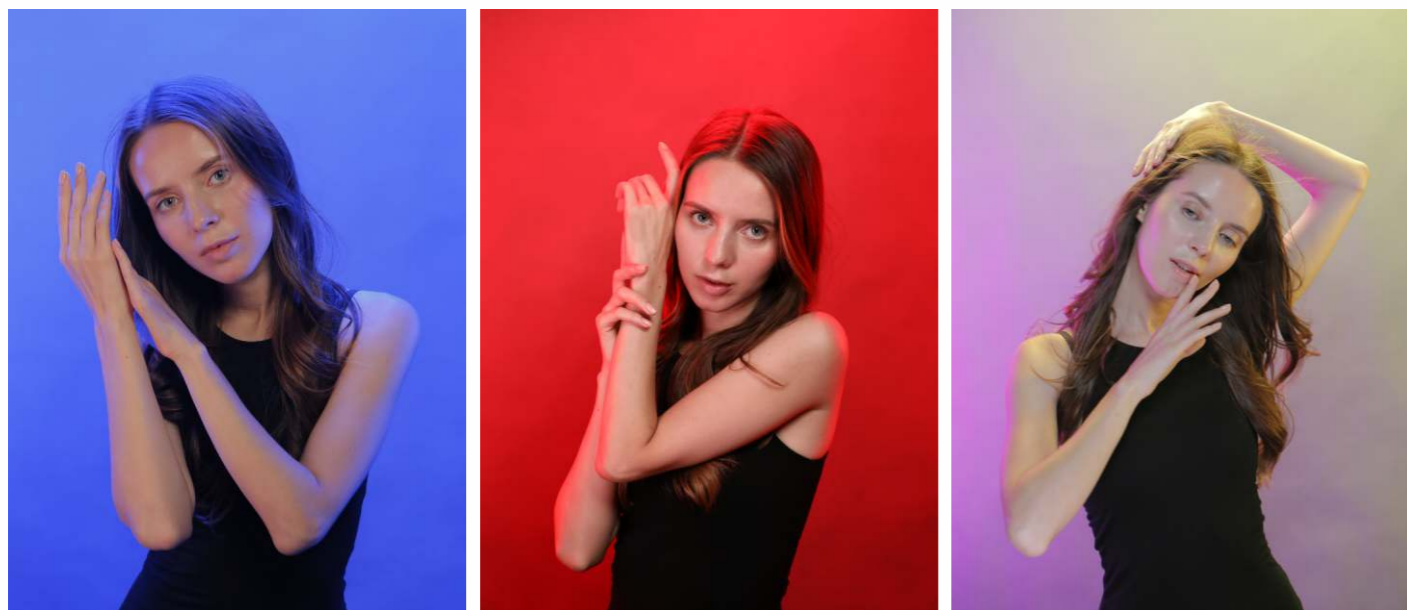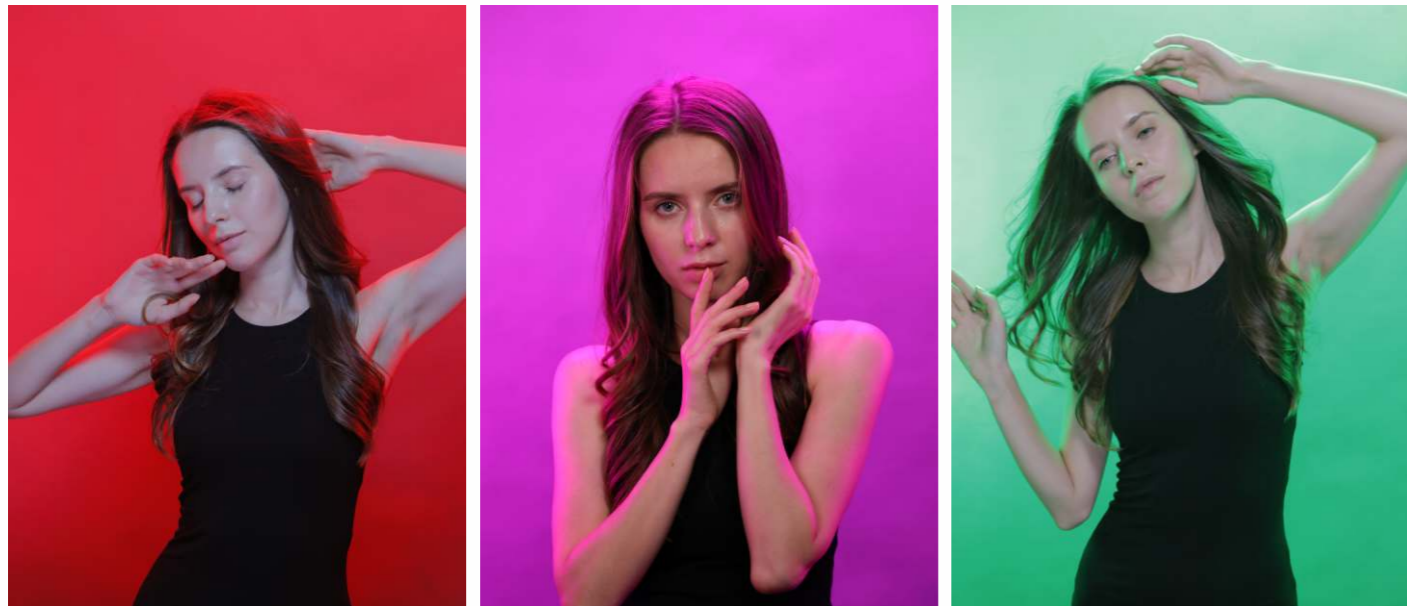

Roll-Flex RGB Light

**RGB**

**全彩卷布灯**

RX-718



# RX-718

## Roll-Flex RGB Light

RX-718 100W 2700K-9999K

Lux/照度	0.5m	1m	2m
5600K (W/RGB)	8210	2560	707
2700K	6300	2000	545
5600K	7030	2200	607



DMX-READY  
DMX操控




COLORITE  
高显色



610mm

460mm

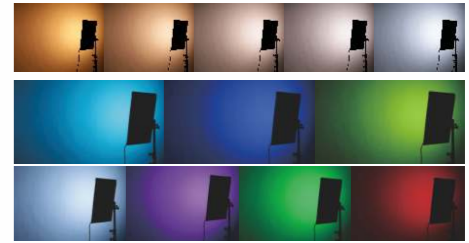


适配器+控制盒



单灯标配: SINGLE LIGHT KIT

RX-718-K1: One Light Kit(单灯套装)



RX-718



Control Box 控制盒



AC Adaptor 适配器  
DC-15V 7A




X-Frame X支架+ CLD-14



WPC-1.5

套装组合: MULTI-LIGHT KIT

RX-718-K2

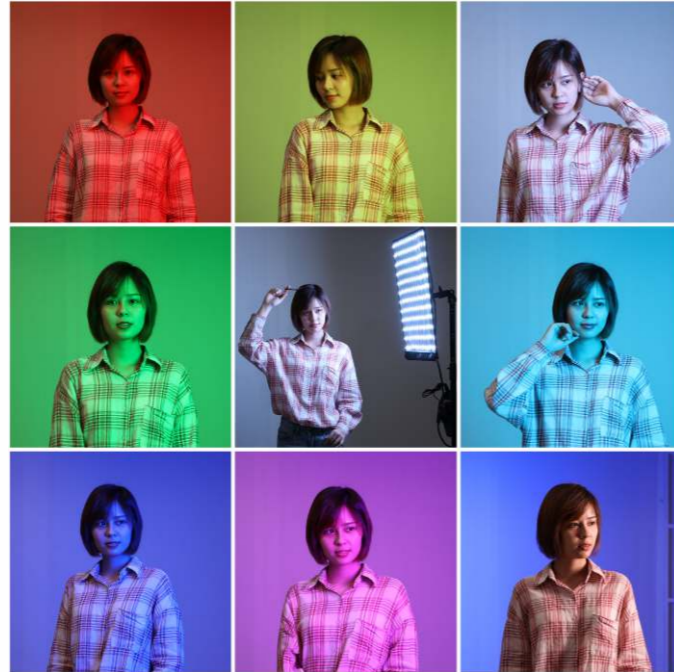

选购配件: OPTIONAL ACCESSORIES



RX-180B



RX-18SBHC



SP-XC04H7(4m)  
SP-XC06H7(6m)



SP-XC08H7(8m)  
SP-XC10H7(10m)



Remote-control  
遥控器:RC-5

Model No. 型号 RX-718

LEDs & Power LED 灯泡数及功率	216pcs x 0.5W<W>/216pcs x 0.5W<Y> 216pcs x 0.3W<RGB>	Footcandles 英尺烛光	5600K(W/RGB) 0.5m:763 1m:238 2m:66 2700K 0.5m:586 1m:186 2m:51 5600K 0.5m:653 1m:204 2m:56
Out put Wattage 输出功率	100W	Dimensions 机身尺寸	610x460mm
Color Temperature 色温	2700K-9999K	Weight 重量	Light:0.76kg Control Box:0.82kg AC Aadtpr 15V/7A:0.47kg
Operating Voltage 工作电压	DC-15V 7A 《输入110W》	Mounting Method 安装配套	X-Frame+CLD-14
Dimming 调光	0-100% Step-less dimming ON/OFF 开关 Turning Knob旋钮 Touch Screen触屏	In the box 配件	AC Adaptor适配器 DC-15V 7A X-Frame X支架+ CLD-14 Control Box 控制盒 Velcro Tape 魔术毛勾贴 WPC-1.5
Compatibility 兼容性	AC Adapter适配器 Sony V Mount Battery(DC)V卡口电池座	Optional Accessories 选购配件	SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m) Remote-control遥控器:RC-5
Control Function 调控方式	Color Matrix Display/DMX-512 /Turning Knob/RC-5		
CRI 显色度	95		
Lux 照度	5600K(W/RGB)0.5m:8210 1m:2560 2m:707 2700K 0.5m:6300 1m:2000 2m:545 5600K 0.5m:7030 1m:2200 2m:607		
Beam Angle 照射角度	10°-360°		



Roll-Flex RGB Light

RGB  
全彩卷布灯


RX-736

# RX-736

## Roll-Flex RGB Light

**RX-736** 200W 2700K-9999K

Lux/照度	0.5m	1m	2m
5600K (W/RGB)	11000	4030	1120
2700K	7790	2860	796
5600K	9320	3470	954

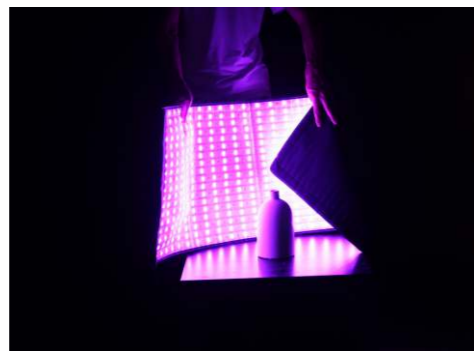

1200mm



465mm



DMX-READY  
DMX操控

COLORITE  
高显色



WPC-1.7



### 单灯标配: SINGLE LIGHT KIT



RX-736



Control Box  
控制盒



X-Frame X支架+ CLD-14



WPC-1.7

### 套装组合: MULTI-LIGHT KIT

RX-736-K2: Two Lights Kit(双灯套装)



WPC-3.4 x1

### 选购配件: OPTIONAL ACCESSORIES



RX-36SBHC



SP-XC04H7(4m)  
SP-XC06H7(6m)



SP-XC08H7(8m)  
SP-XC10H7(10m)



Remote-control  
遥控器:RC-5



Li-ion Battery  
锂电池BP-260HL



Light Stand  
灯架I-2601/B

### Model No. 型号 RX-736



LEDs & Power LED 灯泡数及功率	432pcs x 0.5W<W>/432pcs x 0.5W<Y> 432pcs x 0.3W<RGB>	Footcandles 英尺烛光	5600K(W/RGB)0.5m:1022 1m:374 2m:104 2700K 0.5m:724 1m:265 2m:74 5600K 0.5m:866 1m:322 2m:88
Out put Wattage 输出功率	200W	Dimensions 机身尺寸	1200x465mm
Color Temperature 色温	2700K-9999K	Weight 重量	Light:1.25kg Control Box:0.8kg AC Aadtpr 24V/10A:0.9kg
Operating Voltage 工作电压	DC-24V 10A 《输入240W》	Mounting Method 安装配套	X-Frame+CLD-14
Dimming 调光	0-100% Step-less dimming ON/OFF 开关 Turning Knob旋钮 Touch Screen触屏	In the box 配件	Carry Bag 布袋 AC Adaptor 适配器 DC-24V 10A X-Frame X支架+ CLD-14 Control Box 控制盒 Velcro Tape 魔术毛勾贴 WPC-1.7
Compatibility 兼容性	AC Adapter适配器 Sony V Mount Battery(DC)V卡口电池座	Optional Accessories 选购配件	SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m) Remote-control遥控器:RC-5
Control Function 调控方式	Color Matrix Display/DMX-512 /Turning Knob/RC-5		
CRI 显色度	95		
Lux 照度	5600K(W/RGB)0.5m:11000 1m:4030 2m:1120 2700K 0.5m:7790 1m:2860 2m:796 5600K 0.5m:9320 1m:3470 2m:954		
Beam Angle 照射角度	10°-360°		

# RX-748

## Roll-Flex RGB Light

RX-748 300W 2700K-9999K

Lux/照度	0.5m	1m	2m	3m
5600K (W/RGB)	15000	5670	1830	935
2700K	13100	5020	1610	825
5600K	13400	5110	1630	828

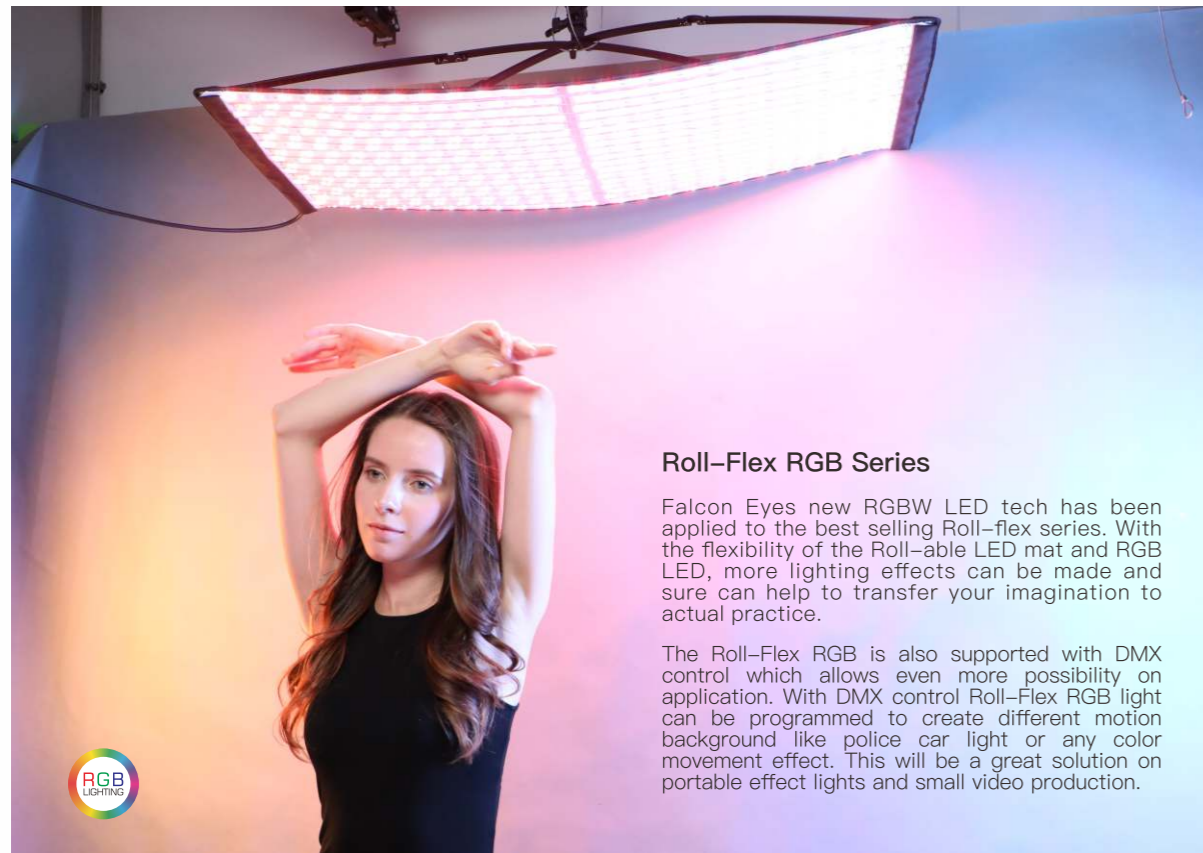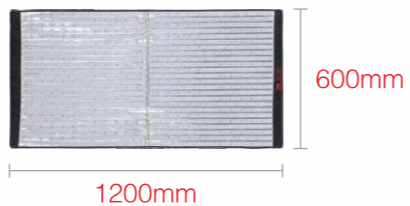

### Roll-Flex RGB Series

Falcon Eyes new RGBW LED tech has been applied to the best selling Roll-flex series. With the flexibility of the Roll-able LED mat and RGB LED, more lighting effects can be made and sure can help to transfer your imagination to actual practice.

The Roll-Flex RGB is also supported with DMX control which allows even more possibility on application. With DMX control Roll-Flex RGB light can be programmed to create different motion background like police car light or any color movement effect. This will be a great solution on portable effect lights and small video production.



### 7彩卷布灯

锐鹰把最新的RGB LED灯技术套用到最畅销的卷布灯上，卷布灯的功能配合RGB LED灯可创造出更多样化的灯光效果，可以把想像的效果转化为实践。

7彩卷布灯同时亦支援DMX控制系统，而且可令7彩卷布灯的应用富更多可能性。配合DMX控制的7彩卷布灯可以编入程式，作出不同的动感光效，如警车灯效果，或其他任何动态光效。这将会成为在影视及舞台上一个优质解决方案。

### 单灯标配: SINGLE LIGHT KIT



RX-748



X-Frame X支架+ CLD-16




Control Box 控制盒



CC-20

# RX-748-K8(八灯套装)

2400W 2700-9999K

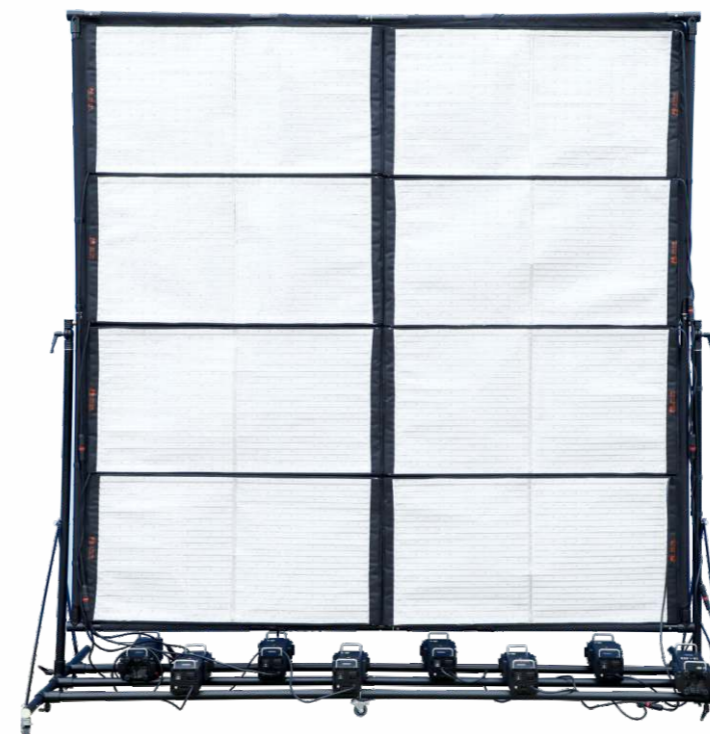

YK-005



### 选购配件: OPTIONAL ACCESSORIES



YK-005



SP-XC04H7(4m)  
SP-XC06H7(6m)



SP-XC08H7(8m)  
SP-XC10H7(10m)



RX-48SBHC  
柔光箱+蜂巢



Remote-control  
遥控器:RC-5

### Model No. 型号 RX-748

LEDs & Power LED 灯泡数及功率	576pcs x 0.5W<W>/576pcs x 0.5W<Y> 576pcs x 0.3W<RGB>	Footcandles 英尺烛光	5600K(W/RGB) 0.5M:1394/1M:527/2M:170 3M:87 5600K/0.5M:1245/1M:475/2M:151 3M:77 2700K/0.5M:1217/1M:467/2M:150 3M:77
Out put Wattage 输出功率	300W	Dimensions 机身尺寸	1200x600mm
Color Temperature 色温	2700K-9999K	Weight 重量	Panel:1.82KG Control box:3.4KG
Operating Voltage 工作电压	AC-110V-240V	Mounting Method 安装配套	X-Frame+CLD-16
Dimming 调光	0-100% Step-less dimming ON/OFF 开关 Turning Knob旋钮 Touch Screen触屏	In the box 配件	Power cord 电源线 Control Box 控制盒 X-Frame X支架+ CLD-16 CC-20
Compatibility 兼容性	AC POWER 交流电 Sony V Mount Battery (DC) V卡口电池座	Optional Accessories 选购配件	SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m) Remote-control 遥控器:RC-5 RX-48SBHC 柔光箱+蜂巢
Control Function 调控方式	Touch Screen / Turning knob DMX-512 / 2.4G remote / RC-5 触屏 旋钮 DMX-512 遥控器:RC-5		
CRI 显色度	95		
Lux 照度	5600K(W/RGB) 0.5M:15000/1M:5670/2M:1830 3M:935 5600K/0.5M:13400/1M:5110/2M:1630 3M:828 2700K/0.5M:13100/1M:5020/2M:1610 3M:825		
Beam Angle 照射角度	10°-360°		

# RX-782

## Roll-Flex RGB Light



### 易撑雷达罩七彩布灯

2700-9999K 220W

The RX-782 is a RGBW light crossover with foldable beautydish feature (size of dia.100cm). It's designed with the folding feature as all other Falcon Eyes foldable beautydishes for the purpose of lightweight and easy to carry around due to its portable size. With the advantage of RGBW lighting technology, creating soft light with RGBW lighting effect is now easier than ever.

RX-782是一款配备了RGBW七彩灯科技的易撑雷达罩（尺寸为直径100cm），它与传统的锐鹰易撑雷达罩具有同样的优点，折叠功能，重量轻，和便于携带。凭借RGBW照明技术的优势，创造出柔和的七彩光源比以往更为容易。



#### 单灯标配: SINGLE LIGHT KIT



RX-782 RX-782-HC Control Box 控制盒 CC-20

#### 选购配件: OPTIONAL ACCESSORIES



Remote-control 遥控器:RC-5 SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m)

#### Model No. 型号 RX-782

LEDs & Power LED 灯泡数及功率	480pcs x 0.5W<W>/480pcs x 0.5W<Y> 480pcs x 0.3W<RGB>	Footcandles 英尺烛光	5600K(W/RGB) 0.5M 1162 / 1M 451 / 2M 125 5600K 0.5M 1292 / 1M 511 / 2M 138 2700K 0.5M 1143 / 1M 448 / 2M 122
Out put Wattage 输出功率	220W	Dimensions 机身尺寸	直径 Dia. 100cm
Color Temperature 色温	2700K-9999K	Weight 重量	Panel:1.82KG Control box:3.4KG
Operating Voltage 工作电压	AC-110V-240V	Mounting Method 安装配套	RX-782-HC Power cord 电源线 Control Box 控制盒 CC-20
Dimming 调光	0-100% Step-less dimming ON/OFF 开关 Turning Knob 旋钮 Touch Screen 触屏	In the box 配件	
Compatibility 兼容性	AC Adaptor 适配器 Sony V Mount Battery (DC) V卡口电池座	Optional Accessories 选购配件	SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m) Remote-control 遥控器:RC-5
Control Function 调控方式	ON/OFF 开关 / 点阵液晶显示屏 DMX-512/Turning Knob 旋钮/RC-5		
CRI 显色度	95		
Lux 照度	5600K(W/RGB) 0.5M 12500 / 1M 4850 / 2M 1350 5600K 0.5M:13900/1M:5500/2M:1490 2700K 0.5M:12300/1M:4820/2M:1310		
Beam Angle 照射角度	66°		



# RX-8T

## Roll-Flex LED Light




**RX-8T** 18W 3000K/5600K

Lux/照度	0.5m	1m	2m
	1660	406	106



### 单灯标配: SINGLE LIGHT KIT

RX-8T x1  
AC Adaptor 适配器 DC-9V 3A x1  
MPH-2B x1

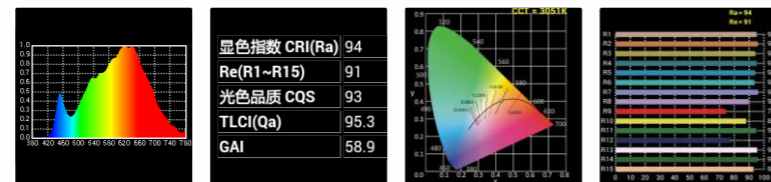

# T12

## Roll-Flex RGB Light

**12T** 50W 2700K-9999K

Lux/照度	0.5m	1m	2m	
	5600K (W/RGB)	5320	1730	355
	2700K	3940	1040	266
	5600K	4390	1160	289



### 单灯标配: SINGLE LIGHT KIT

T12 x1  
Ball Head云台 MPH-2B x1 适配器 15V 5A x1  
Kit Bag 包包 x1


Model No. 型号	RX-8T	T12
LEDs & Power LED 灯泡数及功率	90pcs x 0.2W	120pcs x 0.5W<W>/120pcs x 0.5W<Y> 120pcs x 0.3W<RGB>
Out put Wattage 输出功率	18W	50W
Color Temperature 色温	3200K/5600K	2700K-9999K
Operating Voltage 工作电压	DC-9V 3A	DC-15V 5A 《INPUT 70W》
Dimming 调光	0-100% Step-less Dimming 无极调光	0-100% Step-less dimming ON/OFF 开关 Turning Knob 旋钮
Compatibility 兼容性	AC Adaptor 适配器 Sony FMount Battery锂电池	AC Adaptor 适配器 Sony F Mount Battery 锂电池
Control Function 调控方式	Turning Knob 旋钮	ON/OFF 开关 点阵液晶屏彩屏 遥控RC-5
CRI 显色度	95	95
Lux 照度	0.5M:1660 1M:406 2M: 106	5600K(W/RGB) 0.5M 5320 / 1M 1370 / 2M 355 5600K 0.5M 4390 / 1M 1160 / 2M 289 2700K 0.5M 3940 / 1M 1040 / 2M 266
Beam Angle 照射角度	65°	5600K/60° 5600K+RGB/62°
Footcandles 英尺烛光	0.5M:154 1M:38 2M:10	5600K(W/RGB) 0.5M 494 / 1M 127 / 2M 33 5600K 0.5M 408 / 1M 108 / 2M 27 2700K 0.5M 366 / 1M 97 / 2M 25
Dimensions 机身尺寸	210x210mm	340x325x37mm
Weight 重量	0.4KG	灯:0.63KG
Mounting Method 安装配套	MPH-2B	MPH-2B
In the box 配件	AC Adaptor 适配器 DC-9V 3A MPH-2B	适配器 15V 5A Handle手柄MP-155A Ball Head云台 MPH-2B Carry Bag 布袋
Optional Accessories 选购配件	Softbox 柔光箱RX-8SB Spread Softbox 扩散柔光箱 RX-8OB Sony F-mount Li-ion Battery 锂电池: NP-F550 Battery Charger 充电器:SP-CHG	Remote-control遥控器:RC-5

# RXO-150TDX

## ROLL-FLEX LED Light

RXO-150TDX 150W 3000K-5600K

Lux/照度	0.5m	1m	2m
3000K	2570	820	245
5600K	2880	925	280

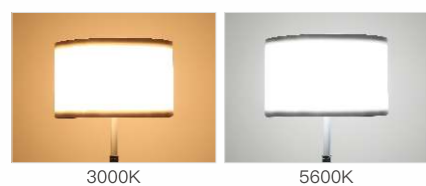

The new RXO-150TDX is a 360° wide-angle soft light as well as a ROLL-FLEX series flex light. This product uses a new film diffuser technology to completely hide the LED beads in order to create beautiful soft light effect.

The RXO-150TDX outputs 150W bi-color (3000K-5600K) light source, CRI reaches up to Ra 95+. The control box has the same configuration as ROLL-FLEX series for 2.4G remote control and DMX function. It can be powered by AC power or V-mount battery for outdoor power supply. In addition, RXO-150TDX is compatible with the optional X-bracket to turn into a ROLL-FLEX light panel, as one light with multi-applications.

全新的RXO-150TDX是一台360度广角柔光灯，同时也是一台ROLL-FLEX系列卷布灯。产品采用了新的胶片柔光技术令灯珠可完全隐藏起来并打出美观的超柔和光线。

RXO-150TDX 能提供150W高功率双色(3000K-5600K)光源，CRI 显色指数达Ra 95+。控制盒跟ROLL-FLEX的配置同样是2.4G遥控及DMX功能，并可使用AC交流电源供电或V-卡口电池于户外供电。此外RXO-150TDX还可另外选购X架支撑成ROLL-FLEX平板布灯，做出一灯多用途的效果。



控制盒 Control Box

V卡口电池座  
Sony V Mount Battery(DC)



# RX-R400TDX

## ROLL-FLEX LED Light

RX-R400TDX 400W 3000K-5600K

Lux/照度	0.5m	1m	2m	3m
内弯3000K	30600	13200	3560	1630
内弯5600K	34300	14500	4040	1850
外弯3000K	16800	6790	2280	1200
外弯5600K	19200	7680	2580	1360



外弯 Outer Curve



内弯 Inner Curve



### 选购配件: OPTIONAL ACCESSORIES



SP-XC04(4m)  
SP-XC06(6m)  
SP-XC08(8m)  
SP-XC10(10m)



Light Stand 灯架  
I-2601/B  
(RXO-150TDX)



Light Stand 灯架  
LM-2900HA/B  
(RX-R400TDX)



X-Frame X支架+ CLD-14  
(RX-R400TDX)



CC-06

Model No. 型号	RXO-150TDX	RX-R400TDX
LEDs & Power LED 灯泡数及功率	672pcs	白<W>: 1056pcs 黄<Y>: 1056pcs
Out put Wattage 输出功率	150W	400W
Color Temperature 色温	3000K - 5600K	3000K-5600K
Operating Voltage 工作电压	DC-15V 13.3A	AC 110-240V 60 HZ/50HZ
Dimming 调光	0-100% Step-less dimming ON/OFF 开关 Touch Screen 触屏	ON/OFF 开关 Turning Knob 旋钮
Compatibility 兼容性	AC Adaptor 适配器 Sony V Mount Battery (DC) V卡口电池座	AC POWER 交流电 0-100% Step-less dimming Turning Knob 旋钮/触屏
Control Function 调控方式	Touch Screen Turning Knob DMX 2.4G remote(RC-3T) 触屏 旋钮 DMX 2.4G遥控器 (RC-3T)	ON/OFF/Turning Knob remote/RC-3T DMX-512/开关/触屏/旋钮/2.4G无线遥控/DMX
CRI 显色度	95	96
Lux 照度	3000K 0.5M:2570 1M:820 2M: 245 5600K 0.5M:2880 1M:925 2M: 280	内弯 3000K 0.5M:30600 1M:13200 2M:3560 3M:1630 内弯 5600K 0.5M:34300 1M:14500 2M:4040 3M:1850 外弯 3000K 0.5M:16800 1M:6790 2M:2280 3M:1200 外弯 5600K 0.5M:19200 1M:7680 2M:2580 3M:1360
Beam Angle 照射角度	360°	10-360°
Footcandles 英尺烛光	3000K 0.5M:239 1M:76 2M: 23 5600K 0.5M:268 1M:86 2M: 26	内弯 3000K 0.5M:2844 1M:1227 2M:331 3M:151 内弯 5600K 0.5M:3188 1M:1348 2M:375 3M:172 外弯 3000K 0.5M:1561 1M:631 2M:212 3M:112 外弯 5600K 0.5M:1784 1M:714 2M:240 3M:126
Dimensions 机身尺寸	500x320mm	1540x650mm
Weight 重量	Light 布灯 Control Box电源:5.14KG	电源: 4.82KG 布灯+架子: 3.53KG
Mounting Method 安装配套		
In the box 配件	AC Adaptor 适配器 DC 15V 13.3A Carry Bag 布袋	AC Adaptor 适配器 DC 15V 13.3A Carry Bag 布袋 CC-06
Optional Accessories 选购配件	X-Frame X支架+ CLD-14 Light Stand 灯架I-2601/B	X-Frame X支架+ CLD-16 Light Stand 灯架 LM-2900HA/B





**RX-12T** 34W 3200K/5600K

Lux/照度	0.5m	1m	2m
	3680	1230	351



**RX-12TD** 50W 3000K-5600K

Lux/照度	0.5m	1m	2m
	6400	1989	515



**RX-18T** 62W 3200K/5600K

Lux/照度	0.5m	1m	2m
	6940	2470	668



**RX-36TDX** 250W 3000K-5600K

Lux/照度	0.5m	1m	2m
	15800	6040	1910



**RX-48TDX** 300W 3000K-5600K

Lux/照度	0.5m	1m	2m
	19200	7540	2460



**RX-120TDX** 600W 3000K-5600K

Lux/照度	0.5m	1m	2m	3m
3000K	29300	13500	4690	2390
5600K	32200	15300	5350	2730



**RX-18TD** 100W 3000K-5600K

Lux/照度	0.5m	1m	2m
	9920	3660	933



**RX-24TDX** 150W 3000K-5600K

Lux/照度	0.5m	1m	2m
	11600	3790	1060



**RX-29TDX** 100W 3000K-5600K

Lux/照度	0.5m	1m	2m
	7980	2960	933



**RX-718** 100W 2700K-9999K

Lux/照度	0.5m	1m	2m
5600K (W/RGB)	8210	2560	707
2700K	6300	2000	545
5600K	7030	2200	607



**RX-736** 200W 2700K-9999K

Lux/照度	0.5m	1m	2m
5600K (W/RGB)	11000	4030	1120
2700K	7790	2860	796
5600K	9320	3470	954



**RX-748** 300W 2700K-9999K

Lux/照度	0.5m	1m	2m	3m
5600K (W/RGB)	15000	5670	1830	935
2700K	13100	5020	1610	825
5600K	13400	5110	1630	828



直径 Dia.100cm

**RX-782** 220W 2700K-9999K

Lux/照度	0.5m	1m	2m
5600K (W/RGB)	12500	4850	1350
2700K	12300	4820	1310
5600K	13900	5500	1490



**RX-748-K8(八灯套装)**

Lux/照度	0.5m	1m	2m	3m	5m	7m	9m
5600K (W/RGB)	24100	19800	8240	6060	2580	1380	771
2700K	18200	16500	8590	5100	2200	1190	728
5600K	20600	17300	9430	5210	2300	1260	769



**RX-8T** 18W 3000K/5600K

Lux/照度	0.5m	1m	2m
	1660	406	106



**T12** 50W 2700K-9999K

Lux/照度	0.5m	1m	2m
5600K (W/RGB)	5320	1730	355
2700K	3940	1040	266
5600K	4390	1160	289



**RXO-150TDX** 150W 3000K-5600K

Lux/照度	0.5m	1m	2m
3000K	2570	820	245
5600K	2880	925	280



**RX-R400TDX** 400W 3000K-5600K

Lux/照度	0.5m	1m	2m	3m
内弯3000K	30600	13200	3560	1630
内弯5600K	34300	14500	4040	1850
外弯3000K	16800	6790	2280	1200
外弯5600K	19200	7680	2580	1360

Roll-Flex LED Light 单/双色温系列

RGB LED LIGHTING 彩色系列

TAGRAM LED LIGHT 机顶系列



**RXO-150TDX**  
150W  
500x320mm



**RX-R400TDX**  
400W  
1540x650mm



**RX-12T**  
34W  
460x320mm



**RX-12TD**  
50W  
460x320mm



**RX-18T**  
62W  
610x460mm



**RX-18TD**  
100W  
610x460mm



**RX-24TDX**  
150W  
625x625mm



**RX-29TDX**  
100W  
1210x240mm



**RX-36TDX**  
250W  
1210x460mm



**RX-48TDX**  
300W  
1215x615mm



**RX-120TDX**  
600W  
1140x1150mm



**RX-718**  
100W  
610x460mm



**RX-736**  
200W  
1200x465mm



**RX-748**  
300W  
1200x600mm



**RX-782**  
220W  
直径 Dia. 1000mm



**RX-8T**  
18W  
210x210mm



**T12**  
50W  
340x325x37mm