

PRODUCT SPECIFICATION (产品参数)


Model No. 型号	LB-16 & LB-32	U4 & U8	BL-30T & BL-30TD	BL-10T & BL-10TD
LEDs & Power LED灯泡数及功率	100pcs x 0.5W (16) 200pcs x 0.5W (32)	80pcs x 1.5W 《80pcs x 4》(U4) 80pcs x 3W 《80pcs x 4》(U8)	1pc x 300W	1pc x 100W
Output Wattage 输出功率	16W / 32W	400W 《100W x 4》(U4) 800W 《200W x 4》(U8)	300W	100W
Color Temperature 色温	3000K-5600K	3000K-8000K	5600K / 3000K-8000K	5600K / 3000K-8000K
Operating Voltage 工作电压	Operating Voltage DC-12V 2A	AC 110-240V 60 HZ/50HZ	AC-110V-240V	DC-15V 7A
Compatibility 兼容性	Battery Capacity 7.4V 24Wh(16) Battery Capacity 7.4V 45Wh(32) 充电器12V/2A	/	AC POWER 交流电 Sony V Mount Battery (DC) V卡口电池座	AC Adaptor 适配器 内置可装锂电池14.8V/5800MAH/ 充电器16.8V/3A
Dimming 调光	0-100% Step-less dimming 0-100%无级调光	0-100% Stepless Dimming 0-100% 3000K-8000K 0-100% 无极调光 色温调控3000K-8000K	Color Temperature 5600K (BL-30T) 3000K-8000K(BL-30TD) 0-100% Intensity	Color Temperature 5600K (BL-10T) 3000K-8000K(BL-10TD) 0-100% Intensity
Beam Angle 照射角度	0.5M 65° (16) 1M 65° (32)	23°	32° 聚光11° 散光20°	37° 聚光10° 散光25°
Control Function 调控方式	Switch+Turning Knob+Mutual Control 按键+旋钮+遥控	Turning Knob/DMX/Touch Screen /2.4Gremote<RC-3T> 旋钮/DMX/触屏/遥控RC-3T	Turning Knob/DMX/Touch Screen /2.4Gremote<RC-3T> 旋钮/DMX/触屏/遥控RC-3T	ON/OFF 开关 Touch Screen 触屏 Mutual Control 互控 2.4Gremote<RC-3T>遥控RC-3T
CRI 显色度	95	95	95	95
Lux 照度 (0.5m/1m/2m/3m)	LB-16 3000K 0.5M:543 1M:152 2M:42 5600K 0.5M:1200 1M:340 2M: 92 LB-32 3000K 0.5M:727 1M:256 2M: 80 5600K 0.5M:1650 1M:593 2M: 180	3000K(黄光): (U4) 1M:32900 2M:11800 3M:5480 5M:2120 7M:1120 9M:704 (U8) 1M:53400 2M:18700 3M:9020 5M:3460 7M:1870 9M:1090 5500K(综合): (U4) 1M:66000 2M:23200 3M:10700 5M:4050 7M:2240 9M:1380 (U8) 1M:107000 2M:37700 3M:18300 5M:6720 7M:3620 9M:2220	(BL-30T) 0.5m:115000 1m:20200 2m:4370 3m:1870 (BL-30TD标准罩) 0.5m:104000 1m:18500 2m:3850 3m:1750 (BL-30TD聚光) 5500K:0.5m:35000 1m:9900 2m:2110 3m:9040 3000K:0.5m:15800 1m:4650 2m:9900 3m:4220 (BL-30TD散光) 5500K:0.5m:151000 1m:50600 2m:14300 3m:6550 3000K:0.5m:63700 1m:22000 2m:6340 3m:2920	(BL-10T) 0.5m:36600 1m:5820 2m:1136 3m:517 (BL-10TD标准罩) 0.5m:28600 1m:4620 2m:936 3m:417 (BL-10TD聚光) 5500K:0.5m:95800 1m:42500 2m:10600 3m:4570 3000K:0.5m:40700 1m:18600 2m:4650 3m:2000 (BL-10TD散光) 5500K:0.5m:37300 1m:10500 2m:2850 3m:1330 3000K:0.5m:16100 1m:5000 2m:1210 3m:570
Footcandles英尺烛光 (0.5m/1m/2m/3m)	LB-16 3000K 0.5M:50 1M:14 2M:4 5600K 0.5M:112 1M:32 2M:9 LB-32 3000K 0.5M:68 1M:24 2M: 7 5600K 0.5M:153 1M:55 2M: 18	3000K(黄光): (U4) 1M:3059 2M:1097 3M:509 5M:197 7M:104 9M:65 (U8) 1M:4963 2M:1739 3M:838 5M:322 7M:174 9M:101 5500K(综合): (U4) 1M:6134 2M:2156 3M:994 5M:376 7M:208 9M:128 (U8) 1M:9944 2M:3504 3M:1701 5M:625 7M:336 9M:206	(BL-30T) 0.5m:10688 1m:1877 2m:406 3m:174 (BL-30TD标准罩) 0.5m:9665 1m:1719 2m:358 3m:163 (BL-30TD聚光) 5500K:0.5m:32528 1m:9284 2m:1961 3m:840 3000K:0.5m:14684 1m:4322 2m:920 3m:392 (BL-30TD散光) 5500K:0.5m:14033 1m:4703 2m:1329 3m:609 3000K:0.5m:5920 1m:2045 2m:539 3m:271	(BL-10T) 0.5m:3401 1m:541 2m:106 3m:39 (BL-10TD标准罩) 0.5m:2658 1m:429 2m:87 3m:39 (BL-10TD聚光) 5500K:0.5m:8903 1m:3950 2m:985 3m:425 3000K:0.5m:3783 1m:1729 2m:432 3m:186 (BL-10TD散光) 5500K:0.5m:3457 1m:976 2m:265 3m:124 3000K:0.5m:1496 1m:418 2m:112 3m:53
Mounting Method 安装配套	-	Wire rope钢丝绳	U-BRACKET	Handle手柄MP-155B
Dimensions 机身尺寸	600x45.5mm (16) 1200x45.5mm (32)	60<dia直径>x20CM 60x90CM<diffuso布罩>(U4) 600mmx600mmx290mm(U8)	490x210x150mm	258x159mm
Weight 重量	0.48KG / 0.93KG	12.6KG(U4) 14.6KG(U8)	Light : 2.75kg / 2.9kg Control Box : 1.35kg / 1.35kg AC Adaptor 24V 15A : 1.39kg	1.88kg
Noise Level(dB) 噪音的分贝强度	/	0.2cm:53dB 0.5cm:49.5dB	0.2M:41.5dB 0.5M:36.7dB(30T) 0.2M:47.5dB 0.5M:42dB(30TD)	0.2m:51dB / 0.5m:43dB
In the box 配件	Carry Bag 布袋 Connector连接器 充电器12V/2A	cylindrical diffuser 圆柱形柔光罩 cylindrical softbox 圆柱形柔光箱 遥控RC-3T	Reflector 标准罩 SR-18 BAG 包包	AC Adaptor 适配器 内置可装锂电池14.8V/5800MAH 充电器16.8V/3A Handle手柄MP-155B Bags摄影包 Reflector标准罩SR-18
Optional Accessories 选购配件	-	-	SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m) Remote-control 遥控器:RC-3T	-

**FALCON EYES**  
SINCE 1993


DESAL  
8-SERIES



200W  
DS-811

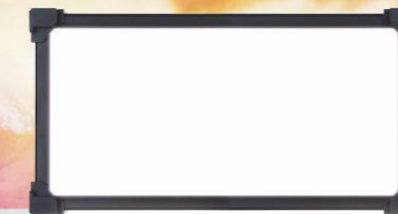

400W  
DS-812

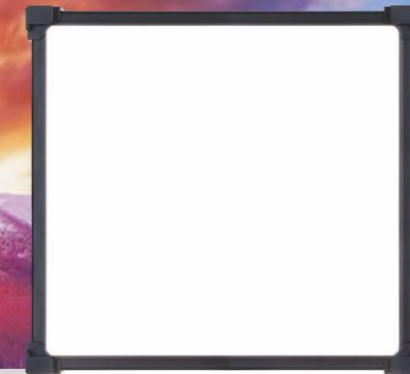

800W  
DS-822



800W  
DS-814

FALCON EYES  
**NEW** 锐鹰  
新品  
PRODUCTS

2018.09

锐鹰有限公司(FALCON EYES LTD.)

Address 香港九龙红磡鹤园街2G号恒丰工业大厦一期11字楼E1室  
Unit E1, 11/F, Phase 1, Hang Fung Building, 2G Hok Yuen Street,  
Hung Hom, Kowloon, Hong Kong

Tel 852-2363-2825

Email info@falconeyes.com.hk

Fax 852-2363-3856

Website www.falconeyes.com.hk



锐鹰官方网站 (香港)  
Falcon Eyes Ltd Official Site (HK)



锐鹰官方微信

# DESAL 8-SERIES

## 蒂莎系列



800W  
DS-822

800W  
DS-814

200W  
DS-811

400W  
DS-812




The all new DESAL 8-Series are developed with the advanced lighting control system that can create a wide range of lighting effect with the RGBW technology.

The new lighting control system gives you flexibility to control color temperature from 2700K to 10000K steplessly, RGBW colors adjustment, white balance G-M fine tuning, HSL (Hue, Saturation, Lightness) colors adjustment, and correspond to CIE coordinates color space, etc.


What's more exciting is that the new DESAL 8-Series has a built-in Gel mode, which possessed with a variety of commonly use film colors lights from LEE and ROSCO. You will only need to select the color code to quickly generate the light color effect that you want to create.

In addition, DESAL 8-Series is equipped with high-resolution 16Bit PWM to DMX-512 signal output as a professional-grade lighting, and it supports wireless DMX control system to allow even more possibilities on application. With DMX control it can be programmed to create different motion background such as police car light, lightning, candlelight, or any other dynamic light effect. This could be a good choice in the lighting industry of stage and broadcasting use.

### Light Color Correction Compensation Signal Accurate Output

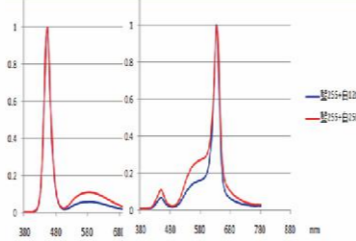

### Plasa ANSI E1.54 Color Calculation

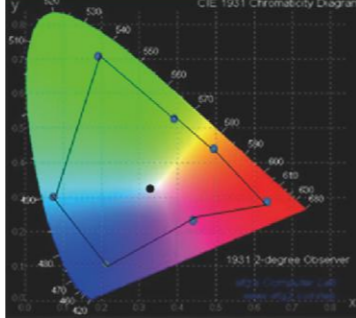

### COLOR NAVIGATOR OPERATIONAL CONTROL




全新的蒂莎DESAL 8系列全彩柔光灯配备了先进的灯光控制系统, 可以利用RGBW光源创造出各式各样的灯光效果。

新的灯光控制系统让你可灵活地控制2700K - 10000K色温调整以及RGBW四色调光, 白平衡GM效果调整, HSL (色调, 饱和度, 亮度) 彩色调整功能, 和可对应CIE (x,y)绝对色度座标等等的功能。


更令人兴奋的是蒂莎DESAL 8系列内建了色片模式, 配备了著名的LEE 及ROSCO 等多种常用胶片灯色, 只需要选择好色号便可快捷地打出你想创造出的灯色效果。

此外, 蒂莎DESAL 8系列还装设了专业级灯光必备的高解析16Bit PWM 转DMX-512讯号输出, 以及支援DMX Wireless 无线控制系统, 这样令蒂莎全彩柔光灯的应用富有更多可能性, 可编入程式作出不同的动感光效, 如警车灯, 闪电, 烛光, 或其他任何动态光效。全新的蒂莎系列将会是影视及舞台灯具的好选择。


## Color Communication-Active Color Navigator

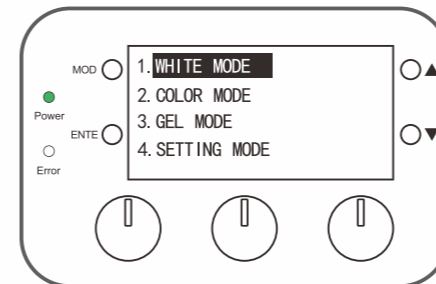

Enter WHITE MODE

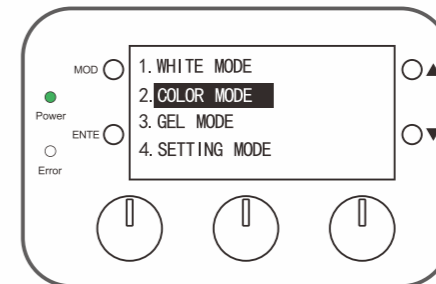

Enter COLOR MODE

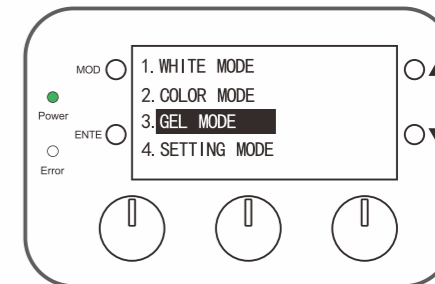

Enter GEL MODE

### White Light Mode

- RGBW 4 colors adjustment
- High Efficiency 16Bit Signal Transmission
- High CRI White Light Performance
- Light Intensity Linear Output
- White Balance G-M Fine Adjustment

### RGB Mode

- RGB (0-255) Scale Display
- Corresponding CIE (x,y) Chromaticity Diagram
- Gamut Light Color Display
- HSL Color Adjustment Function (Hue, Saturation, Lightness)


### Color Gel Mode

- Built-in LEE, ROSCO gels, etc.
- x,y coordinates and light color RGB ratio
- Gamut light color values via ACN
- User can create database for common-used colors



## Product Features

- White Balance adjustment for Color Temperature (CT) 2700 - 10000K
- RGB adjustment corresponding with CIE 1931 color space
- White Balance G-M Fine Adjustment
- RGB Gamut Light Color Display
- High resolution 16Bit PWM to DMX-512 signal output
- Support DMX-512 / DMX wireless control
- HSL 360° light color structure corresponding with CIE 1931 color space

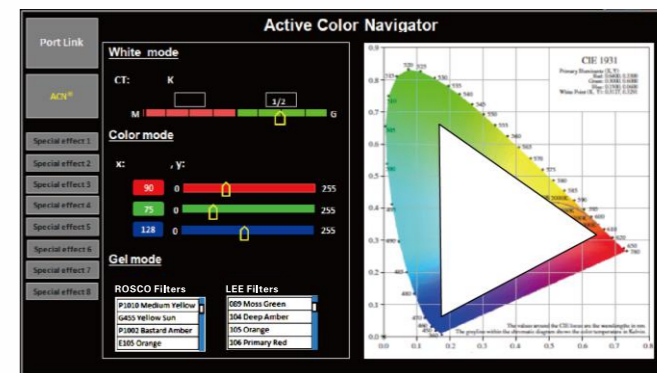

▲ Light colors in Gamut can be accurately replicated through ACN



## Specification

LCD Display	2.4" OLED Resistive Touch Panel	Color Light	Full RGB +W color gamut, hue, saturation, light dimming control
Function	Active dimming system	White Light	2700K - 10000K color temperature control / G-M Adjustment
	<ul style="list-style-type: none"> <li>RGB Color dimming (x,y color system , RGB ratio display)</li> <li>RGBW High rendering white light (color temperature, G-M Adjustment)</li> <li>Gamut light color display function</li> <li>Built-in LEE gels</li> <li>Built-in ROSCO gels</li> <li>Database system (x,y coordinates &amp; Light color)</li> </ul>	Color Performance	CRI >95 TLCI > 98

# ROLL-FLEX RGB SERIES:RX-718/736 RGB 7彩卷布灯RX-718/736

## Roll-Flex RGB Series

Falcon Eyes new RGBW LED tech has been applied to the best selling Roll-flex series. With the flexibility of the Roll-able LED mat and RGB LED, more lighting effects can be made and sure can help to transfer your imagination to actual practice.

The Roll-Flex RGB is also supported with DMX control which allows even more possibility on application. With DMX control Roll-Flex RGB light can be programmed to create different motion background like police car light or any color movement effect. This will be a great solution on portable effect lights and small video production.

## 7彩卷布灯

锐鹰把最新的RGB LED灯技术套用到最畅销的卷布灯上，卷布灯的功能配合RGB LED灯可创造出更多样化的灯光效果，可以把想像的效果转化为实践。

7彩卷布灯同时亦支援DMX控制系统，而且可令7彩卷布灯的应用富更多可能性。配合DMX控制的7彩卷布灯可以编入程式，作出不同的动感光效，如警车灯效果，或其他任何动态光效。这将会成为在影视及舞台上的一一个优质解决方案。



RX-718



RX-736

(RX-718) 2 Lights Kit



(RX-736) 2 Lights Kit



## IN THE BOX 配件

### (RX-718)

RX-718-K1: One Light Kit(单灯套装)  
RX-718 x 1  
RX-18SBHC x 1  
WPC-1.5 x 1

RX-718-K2: Two Lights Kit(双灯套装)  
RX-718 x 2  
RX-18SBHC x 2  
WPC-1.8 x 1

### (RX-736)

RX-736-K1: One Light Kit (单灯套装)  
RX-736 x 1  
RX-36SBHC x 1  
WPC-1.7 x 1

RX-736-K2: Two Lights Kit(双灯套装)  
RX-736 x 2  
RX-36SBHC x 2  
WPC-3.4 x 1

RX-718

RX-736

适配器+控制盒




## OPTIONAL ACCESSORIES 可选配件




RX-180B




RX-18SBHC



RX-36SBHC



SP-XC04H7(4m)  
SP-XC08H7(8m)



SP-XC06H7(6m)  
SP-XC10H7(10m)

ROLL-FLEX RGB SERIES:RX-748/RX-782  
**RGB 7彩卷布灯RX-748/RX-782**



**Roll-Flex RGB Series**

Falcon Eyes new RGBW LED tech has been applied to the best selling Roll-flex series. With the flexibility of the Roll-able LED mat and RGB LED, more lighting effects can be made and sure can help to transfer your imagination to actual practice.

The Roll-Flex RGB is also supported with DMX control which allows even more possibility on application. With DMX control Roll-Flex RGB light can be programmed to create different motion background like police car light or any color movement effect. This will be a great solution on portable effect lights and small video production.

**7彩卷布灯**

锐鹰把最新的RGB LED灯技术套用到最畅销的卷布灯上，卷布灯的功能配合RGB LED灯可创造出更多样化的灯光效果，可以把想像的效果转化为实践。

7彩卷布灯同时亦支援DMX控制系统,而且可令7彩卷布灯的应用富更多可能性。配合DMX控制的7彩卷布灯可以编入程式,作出不同的动感光效,如警车灯效果,或其他任何动态光效。这将会成为在影视及舞台上的一一个优质解决方案。

**RX-748-K8(八灯套装)**



**RX-782 (易撑雷达罩七彩布灯 220W)**



The RX-782 is a RGBW light crossover with foldable beautydish feature (size of dia.100cm). It's designed with the folding feature as all other Falcon Eyes foldable beautydishes for the purpose of lightweight and easy to carry around due to its portable size. With the advantage of RGBW lighting technology, creating soft light with RGBW lighting effect is now easier than ever.

RX-782是一款配备了RGBW七彩灯科技的易撑雷达罩（尺寸为直径100cm），它与传统的锐鹰易撑雷达罩具有同样的优点，折叠功能，重量轻，和便于携带。凭借RGBW照明技术的优势，创造出柔和的七彩光源比以往更为容易。

**RX-48TDX 300W 3000-5600K**



**RX-48TDX-K8(八灯套装)**

# TAGRAM RGB LED LIGHT TAGRAM系列机顶RGB LED灯

T8&T12



The new Tagram RGB LED light is a series combines with different table top RGB lighting which is perfectly for small studio use.

The highlight of these RGB lights are able to use the tungsten and white LED to provide a wide range color temperature choice from 2700K to 9999K with a high CRI quality of 95. Tungsten and White LED can also separate control with RGB LED which RGB LED can add saturation on different color temperature setting.

RGB LED can be adjust saturation from 0-255 and is able to adjust in digit which able to provide a precise setting to satisfy different requirements.

Tagram is now coming with a 30W RGB-LED Panel T-8 and a 50W roll-flex RGB panel T-12. They can both be mounting on stands or even on camera. The ball-head mounting can be easily attached to different studio mounting system which is very convenient and fast when changing settings. Both units also support SONY NP-F battery so it can support outdoor operation as well.



新的Tagram系列机顶RGB LED灯是一个主张轻巧易用的便携彩色LED系列，十分适合小型影室创造不同颜色灯光效果使用。

Tagram系列机顶RGB LED灯的亮点在于可以同时利用黄色及白色LED，而且色温范围广，可由2700K-9999K，而且显色度高达CRI 95.黄色及白色LED也可跟RGB LED同时使用，RGB LED可以在基本色温上作三基色饱和度调整。

RGB的LED灯珠可以重0-255调较饱和度。而每一项更可以个位数调整，令用户可以作出精细微调，满足各种不同设定需要。

现时Tagram系列机顶RGB LED灯有两款，分别是30W机顶LED灯，T-8，及50W RGB布灯，T-12。这两款灯都可以运用随机配的球头座安装到不同的摄影器材上，如灯架或相机热靴等等。在小型影室需要经常变换各种设定上，Tagram系列可以做到快速及方便的切换。Tagram系列机顶RGB LED灯同时可使用索尼NP-F电池使用，同时外拍的需求。

**T8** | 输出OUTPUT:30W 3000K-5600K | CRI:95 | 尺寸Dimensions: 224x149x45mm




T8  
Ball Head云台 MPH-5B x 1 NP-F550 电池 x 2  
SP-CHG 充电器 x 1 Kit Bag 包包 x 1




**T12** | 输出OUTPUT:50W 2700K-9999K | CRI:95 | 尺寸Dimensions: 340x325x37mm



T12  
Ball Head云台 MPH-5B x 1 适配器 15V 5A x 1  
Kit Bag 包包 x 1

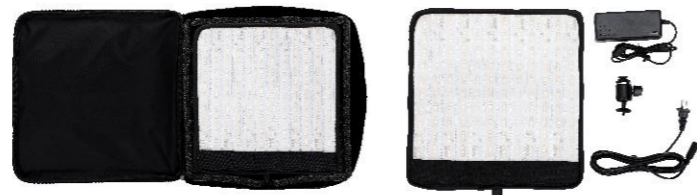

# LED LIGHTPIPE:LB-16/32 LED光管灯LB-16/32

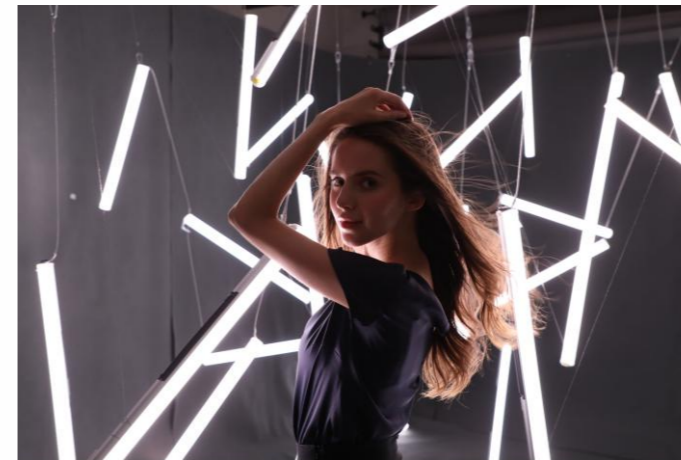

The LB- bar LED is a handy LED bar which generates beautiful soft light. It is perfect to use in studio or outdoor with the internal rechargeable battery. The white diffuser is more than 180° which the light is spreading more evenly.

There is also different connecting accessories which able to combine multiple units to from a longer light tube or create different shapes of lighting. The color temperature is from 3000K-5600K adjustable and there is a 2.4G remote RC-3T available to control multiple units (Optional accessories).

LB-16及LB-32 LED灯棒可以制造柔和的灯光，适合在影室或户外使用。机体内置锂电池可以充电循环使用。表面的弧形柔光片更达至180°，令灯光分布更均匀。

LED灯棒可以配合连接配件使用，连接成更长的灯棒或不同形状的光效。色温更可从3000K-5600K调节。配合2.4G遥控器RC-3T (选购配件)可以令多支LED灯棒同步调较。



LB-16-K3 (Three lights Kit 三灯套装)  
LB-16 x3 LB-A x2 套装箱 x1



LB-16-K6 (Six lights Kit 六灯套装)  
LB-16 x6 LB-A x4 套装箱 x1



WPC-1.6

**UO-SERIES U4/U8 SKY LIGHT**  
**天灯U4/U8**

The FalconEyes UO-series U8 Sky Light is designed to provide bi-color softlight from up above the ground level, performing like a portable ceiling soft light when using with light boom. The U8 is developed with built-in DMX feature for easy adjustment on the color and light setting, while 2.4GHz remote control (RC-3T controller) is also available to meet different shooting requirements.

As from the latest LED technology, U8 has achieved a maximum 800W power output and a high CRI of Ra 98 professional level lighting, with the help of the cylindrical shaped diffuser and softbox, producing professional footage is now easier than ever.

锐鹰新研制的优仕U8天灯能于高处提供双色柔光光源，配合灯架横杆使用时，即变身成便携式天花柔光灯。U8可通过DMX控制调整色温和亮度，及2.4GHz远程操控来调整灯光设置（配合RC-3T遥控器使用），使其能满足不同场景的拍摄需求。

配合现时新的LED技术，U8已成功达到总输出800W以及高显色指数（CRI 98）的高品质光源。其独特设计的圆柱形柔光罩及柔光箱能有效地做出优美的柔光效果，令你能轻松地制作出专业视频。



**U8(带散热风扇)**


功率及灯泡数Output & LEDs:

800W (200W x 4) 80pcs x 3W (80pcs x 4)

色温Color Temperature: 3000K-8000K

照度LUX: 1M:107000 2M:37700 3M:18300

英尺烛光Foot Candle: 1M:9944 2M:3504 3M:1701

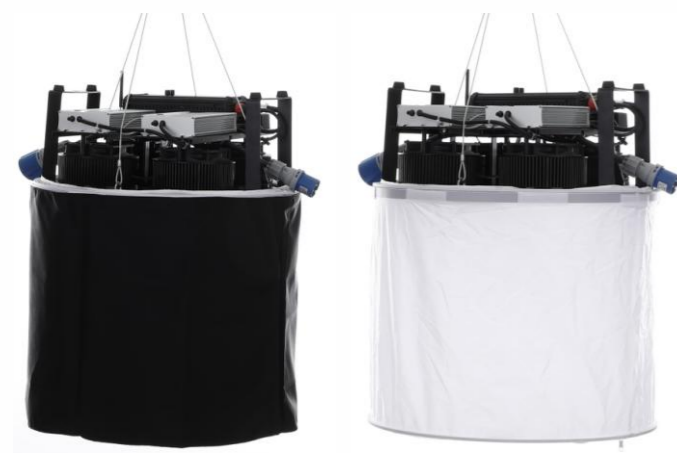

BL-30T/BL-30TD



BL-10T/BL-10TD

LED SPOT LIGHT  
-BATEL

**强力LED摄像灯**

BL-30T/TD & BL-10T/TD

5600K / 3000-8000K

# LED SPOT LIGHT: BL-30T/30TD & BL-10T/10TD 强力LED摄影摄像灯: BL-30T/30TD & BL-10T/10TD

## BL-30T/30TD

Falcon Eyes had developed new models for BL series which are BL-30T & BL-30TD and designed with high power output. Comparing with the similar types of LED lights, BL-30T/ TD has a much powerful LUX and more compact.

BL-30T is single color version (5600K) and BL-30TD is bi-color version from 3000K-8000K. The maximum output reach 300W, moreover BL-30T/ TD are supported with AC power or V-mount battery so there are more flexibility on power source and enable for outdoor using.

BL-30T/ TD are equipped the control boxes with LCD touch screen control. Desirable light can be adjusted easily. It is implanted with DMX feature and 2.4G remote control feature (RC-3T). BL-30T/ TD are equipped with silent cooling fan which can ensure the stability of the lights and the product life.

Kit set with well equipment is available.

锐鹰为BL系列研发了两款全新型号BL-30T和BL-30TD, 比以往同类型的灯更为轻便。

BL-30T 是单色温型号 (5600K) 及 BL-30TD双色温型号 (3000K-8000K), 其最大的功率可达至300W并支援电池供电和AC电源, 令你在不同的拍摄环境有更多的供电选择。

BL-30T/TD配备触屏控制盒, 令你可以更准确地调节输出, 调出理想的光源。而且均有植入DMX系统和接受功能配合RC-3T遥控器使用。BL-30T/TD配备了散热风扇, 使其在高输出时表现更稳定并能够保障灯具寿命。

此款灯会配合多配件套装发售。



BL-30T

BL-30TD

### BL-30T/30TD (Kit套装)

LED摄影灯 (支援电池)  
LED Spot Light (battery support)  
BL-30T x1 / BL-30TD x1

聚光筒 Optical Snoot LPSA-BOF x1

灯架 LMC-2100 x1

柔光箱 Softbox PSB-9 x1

套装箱 Suit bag CC-22 x1



## BL-10T/10TD

Application for LED is now more popular and it is difficult to carry various accessories and batteries moving around. BL-10T (single color) & BL-10TD (Bi-color) are new LED studio light introduced by Falcon Eyes this year, the BL-10T and BL-10TD are designed with internal battery inside the housing so the light is powered as it original look.

BL-10T & BL-10TD also support AC power so there are more options in different environment use.

BL-10T is single color version (3000K or 5600K) and BL-6TD is bi-color version from 3000K-8000K. Both versions are equipped with "Mutual Control" function which you can group multiple fixtures under groups and control the group with one of the fixtures.

The battery is removable for recharging, or act as a power bank for your smart phone as well. The fully charged battery can operate the light for 45 minutes in full output.

现时应用LED拍摄方面渐趋多元化,令携带配件及移动电源变得愈来愈占空间及重量。有见及此,锐鹰公司研发推出BL-10T及BL-10TD电池LED灯,可移除的电池已配备在LED灯内,令你不需要在灯以外还要接上额外的电源。BL-10T及BL-10TD同时可支援全电压AC电源, 令你在不同的拍摄环境有更多的供电选择。

BL-10T是单色温型号(3000K 或5600K) 而BL-10TD 是双色温型号 (3000-8000K)。两款型号都配备了互控功能, 令你可以使用多台灯的时间把需要的灯具组合在一起, 只需要控制一台灯就可以控制整组灯具。

灯内的电池可以拆下充电, 或变为充电宝为小型电器充电使用。电池充满电后于全功率输出的情况下可运行约45分钟。



内置可装锂电池14.8V 5800MAH / 充电器16.8V/3A



AC Adaptor 适配器

## Accessories 配件



CLD-16

安全箱 Safety box:WPC-1.5  
外尺寸 Outer size:520x340x135mm  
内尺寸 Internal size:500x300x120mm

安全箱 Safety box:WPC-1.6  
外尺寸 Outer size:611x440x193mm  
内尺寸 Internal size:590x390x180mm

安全箱 Safety box:WPC-1.7  
外尺寸 Outer size:555x460x185mm  
内尺寸 Internal size:500x400x165mm

安全箱 Safety box:WPC-1.8  
外尺寸 Outer size:555x460x225mm  
内尺寸 Internal size:500x400x210mm

安全箱 Safety box:WPC-3.4  
外尺寸 Outer size:575x421x287mm  
内尺寸 Internal size:515x360x245mm

## 重型横臂架 FD-5500+JHS-01MC Heavy duty Boom Arm FD-5500+JHS-01MC



FD-5500

JHS-01MC



## 2.4米移动反光屏 RRK-2424 2.4M Moveable Reflector Panel RRK-2424



升降高度  
120-210CM

柔黑银三合一



PRODUCT SPECIFICATION (产品参数)

Model No. 型号	 RX-718	 RX-736	 RX-748	 RX-782
• LEDs & Power LED灯泡数及功率	216pcs x 0.5W<W>/ 216pcs x 0.5W<Y> 216pcs x 0.3W<RGB>	432pcs x 0.5W<W>/ 432pcs x 0.5W<Y> 432pcs x 0.3W<RGB>	576pcs x 0.5W<W>/ 576pcs x 0.5W<Y> 576pcs x 0.3W<RGB>	480pcs x 0.5W<W>/ 480pcs x 0.5W<Y> 480pcs x 0.3W<RGB>
• Output Wattage 输出功率	Output:100W	Input:384W Output:200W	Output:300W	Output:220W
• Color Temperature 色温	2700K-9999K	2700K-9999K	2700K-9999K	2700K-9999K
• Operating Voltage 工作电压	DC-15V 7A 《输入110W》	DC-24V 10A 《输入240W》	AC-110V-240V	AC-110V-240V
• Compatibility 兼容性	AC Adapter适配器 Sony V Mount Battery(DC) V卡口电池座	AC Adapter适配器 Sony V Mount Battery(DC) V卡口电池座	AC POWER 交流电 Sony V Mount Battery (DC) V卡口电池座	AC Adaptor适配器 Sony V Mount Battery (DC) V卡口电池座
• Dimming 调光	0-100% Step-less dimming ON/OFF 开关 Turning Knob旋钮 Touch Screen触屏	0-100% Step-less dimming ON/OFF 开关 Turning Knob旋钮 Touch Screen触屏	0-100% Step-less dimming ON/OFF 开关 Turning Knob旋钮 Touch Screen触屏	0-100% Step-less dimming ON/OFF 开关 Turning Knob旋钮 Touch Screen触屏
• Beam Angle 照射角度	10°-360°	10°-360°	10°-360°	66°
• Control Function 调控方式	Color Matrix Display/DMX-512 /Turning Knob/RC-5	Color Matrix Display/DMX-512 /Turning Knob/RC-5	Touch Screen / Turning knob DMX-512 / 2.4G remote / RC-5 触屏 旋钮 DMX-512 遥控器:RC-5	ON/OFF 开关 / 点阵液晶彩屏 DMX-512/Turning Knob 旋钮/RC-5
• CRI 显色度	95	95	95	95
• Lux 照度 (0.5m/1m/2m/3m)	5600K(W/RGB) 0.5m:8210 1m:2560 2m:707  2700K 0.5m:6300 1m:2000 2m:545  5600K 0.5m:7030 1m:2200 2m:607	5600K(W/RGB) 0.5m:11000 1m:4030 2m:1120  2700K 0.5m:7790 1m:2860 2m:796  5600K 0.5m:9320 1m:3470 2m:954	5600K(W/RGB) 0.5M:15000/1M:5670/2M:1830 3M:935 5600K/0.5M:13400/1M:5110/2M:1630 3M:828 2700K/0.5M:13100/1M:5020/2M:1610 3M:825	5600K(W/RGB) 0.5M 12500 / 1M 4850 / 2M 1350  5600K 0.5M:13900/1M:5500/2M:1490  2700K 0.5M:12300/1M:4820/2M:1310
• Footcandles英尺烛光 (0.5m/1m/2m/3m)	5600K(W/RGB) 0.5m:763 1m:238 2m:66  2700K 0.5m:586 1m:186 2m:51 5600K 0.5m:653 1m:204 2m:56	5600K(W/RGB) 0.5m:1022 1m:374 2m:104  2700K 0.5m:724 1m:265 2m:74 5600K 0.5m:866 1m:322 2m:88	5600K(W/RGB) 0.5M:1394/1M:527/2M:170 3M:87 5600K/0.5M:1245/1M:475/2M:151 3M:77 2700K/0.5M:1217/1M:467/2M:150 3M:77	5600K(W/RGB) 0.5M 1162 / 1M 451 / 2M 125  5600K 0.5M 1292 / 1M 511 / 2M 138  2700K 0.5M 1143 / 1M 448 / 2M 122
• Mounting Method 安装配套	X-Frame+CLD-14	X-Frame+CLD-14	X-Frame+CLD-16	RX-782相机托架
• Dimensions 机身尺寸	610x460mm	1120x465mm	1200x600mm	直径 Dia. 100cm
• Weight 重量	Light:0.76kg Control Box:0.82kg AC Aadtpr 15V/7A:0.47kg	Light:1.25kg Control Box:0.8kg AC Aadtpr 24V/10A:0.9kg	Panel:1.82KG Control box:3.4KG	Panel:1.82KG Control box:3.4KG
• Noise Level(dB) 噪音的分贝强度	/	/	/	/
• In the box 配件	AC Adaptor适配器 DC-15V 7A X-Frame X支架+ CLD-14 Control Box 控制盒 Velcro Tape 魔术毛勾贴 WPC-1.5	Carry Bag 布袋 AC Adaptor 适配器 DC-24V 10A X-Frame X支架+ CLD-14 Control Box 控制盒 Velcro Tape 魔术毛勾贴 WPC-1.7	电源线 Control Box 控制盒 X-Frame X支架+ CLD-16 CC-20	电源线 Control Box 控制盒 RX-782相机托架 CC-20
• Optional Accessories 选购配件	SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m) Remote-control遥控器:RC-5	SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m) Remote-control遥控器:RC-5	SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m) Remote-control遥控器:RC-5 RX-48SBHC 柔光箱+蜂巢	SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m) Remote-control遥控器:RC-5

PRODUCT SPECIFICATION (产品参数)

Model No. 型号	 RX-48TDX	 T8	 T12
• LEDs & Power LED灯泡数及功率	1512pcs	60pcs x 0.5W<W>/60pcs x 0.5W<Y> 110pcs x 0.3W<RGB>	120pcs x 0.5W<W>/120pcs x 0.5W<Y> 120pcs x 0.3W<RGB>
• Output Wattage 输出功率	300W	OUTPUT:30W	OUTPUT:50W
• Color Temperature 色温	3000K - 5600K	3000K-5600K	2700K-9999K
• Operating Voltage 工作电压	AC-110V-240V	DC-15V 3A 《INPUT 45W》	DC-15V 5A 《INPUT 70W》
• Compatibility 兼容性	AC POWER 交流电 Sony V Mount Battery (DC) V卡口电池座	AC Adaptor 适配器 Sony F Mount Battery 锂电池	AC Adaptor 适配器 Sony F Mount Battery 锂电池
• Dimming 调光	0-100% Step-less dimming ON/OFF 开关 Touch Screen 触屏	0-100% Step-less dimming ON/OFF 开关 Turning Knob 旋钮	0-100% Step-less dimming ON/OFF 开关 Turning Knob 旋钮
• Beam Angle 照射角度	10-360°	5600K/50° 5600K+RGB/53°	5600K/60° 5600K+RGB/62°
• Control Function 调控方式	Touch Screen Turning knob DMX 2.4G remote/RC-3T 触屏 旋钮 DMX 2.4G遥控器RC-3T	ON/OFF 开关 点阵液晶彩屏 遥控RC-5	ON/OFF 开关 点阵液晶彩屏 遥控RC-5
• CRI 显色度	95	95	95
• Lux 照度 (0.5m/1m/2m/3m)	0.5M:19200 1M:7540 2M: 2460	5600K(W/RGB) 0.5M 5000 / 1M 1260 / 2M 326 5600K 0.5M 4140 / 1M 1060 / 2M 270 3000K 0.5M 3655 / 1M 903 / 2M 237	5600K(W/RGB) 0.5M 5320 / 1M 1370 / 2M 355 5600K 0.5M 4390 / 1M 1160 / 2M 289 2700K 0.5M 3940 / 1M 1040 / 2M 266
• Footcandles英尺烛光 (0.5m/1m/2m/3m)	0.5M:1784 1M:701 2M:229	5600K(W/RGB) 0.5M 465 / 1M 117 / 2M 30 5600K: 0.5M 385 / 1M 99 / 2M 25 3000K: 0.5M 340 / 1M 84 / 2M 22	5600K(W/RGB) 0.5M 494 / 1M 127 / 2M 33 5600K / 0.5M 408 / 1M 108 / 2M 27 2700K / 0.5M 366 / 1M 97 / 2M 25
• Mounting Method 安装配套	X-Frame+CLD-16 X支架+万向接头	MPH-5B	MPH-5B
• Dimensions 机身尺寸	布灯: 1215x615mm 电源: 320x155x140mm	224x149x45mm	340x325x37mm
• Weight 重量	Light 布灯:1.36KG Control Box电源:3.55KG	灯:0.77KG	灯:0.63KG
• Noise Level(dB) 噪音的分贝强度	/	/	/
• In the box 配件	电源线 Control Box 控制盒 X-Frame X支架+ CLD-16 CC-20	NP-550锂电池 电池充电器 Ball Head云台 MPH-5B Carry Bag 布袋	适配器 15V 5A Handle手柄MP-155A Ball Head云台 MPH-5B Carry Bag 布袋
• Optional Accessories 选购配件	-	Remote-control遥控器:RC-5	Remote-control遥控器:RC-5